



九鼎散热器
JIUDING RADIATOR



TIANJIN JIUDING YANGGUANG HVAC CO., LTD



扫码关注九鼎官方网站

📍 Zeng 3, No. 9, Wuwei Road, Ninghe Economic Development Zone, Tianjin, China

☎ 86-22-69189950 86-22-69169098

✉ 1185279645@qq.com 🌐 www.jdradiator.com




JIUDING RADIATOR

www.jdradiator.com




01 series


搭焊系列 Designer Radiator

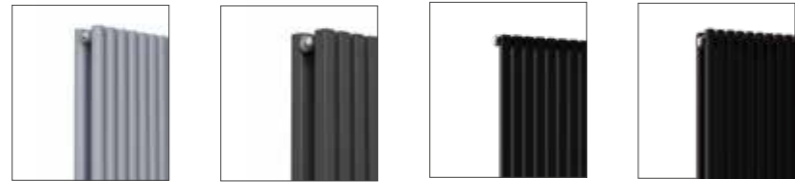


JD25Y P05 JD25/28 P07 JD30F P09 JD30/15 P11

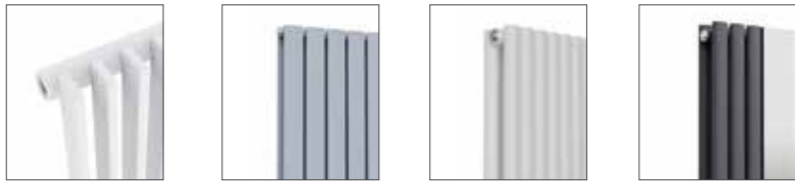

JD40/12L P13 JD40/15 P15 JD40 P17 JD50/25JZ P18

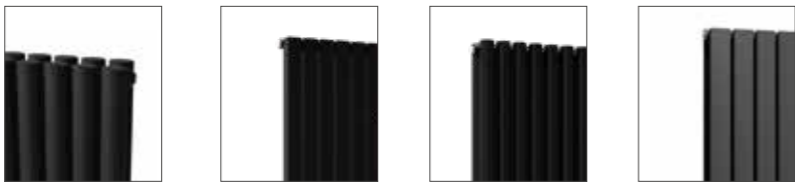

JD50/25 P19 JD50F P21 JD50Y P23 JD60/15 P25

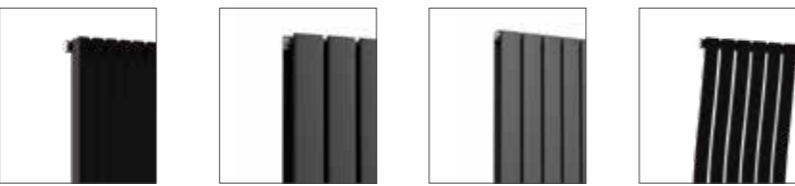

JD60/30 P27 JD68/12 P29 JD70/15 P31 JDSC P33

02 series


柱式系列 Column Radiator



JDGZ2 P36 JDGZ3 P37 JDGZ4 P39

03 series

卫浴系列 Towel Radiator

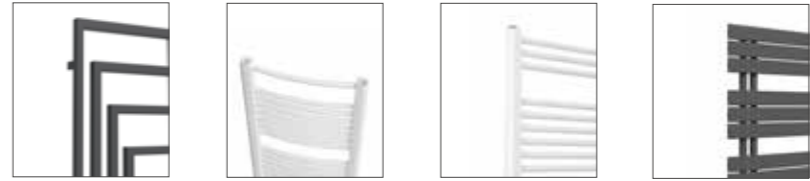

JD30SLF P42 JDWY (C) P43 JDWY (S) P44 JD60/15DF P45

04 series

铜铝系列 Bimetal Radiator



JD75/75TL P47 JD132/60TL P48 JD80/80 P49

05 series

板式系列 Panel Radiator



JD-11K P53 JD-22K P57

JD-23K P61 JD-33K P65

CONTENTS



1998 - NOW

COMPANY INTRODUCTION

公司介绍

TIANJIN JIUDING YANGGUANG HVAC CO., LTD. (or Tianjin Jiuding Sunshine Heating Radiator Co., Ltd.) specializes in manufacturing heating radiators.

天津市九鼎阳光暖通有限公司是一家生产水暖散热器的专业厂家。

45,000 square meter

Factory area
工厂占地面积

工厂成立于1998年,厂址坐落在天津市宁河经济开发区,公司占地面积4.5万平方米,总投资超过5000万元人民币。2011年成为中国建设部指定专业生产散热器的企业,被评为行业领先。我司研发制造的散热器产品远销欧洲、北美、中东、俄罗斯等国以及国内80多个省市,以其高档、豪华、时尚、人性化的特点深受消费者青睐。

我们工厂拥有5台全自动生产线,全部采用日本松下电焊机和瑞士gema粉末枪,焊接位置牢固均匀,漆皮致密光滑。现设计散热器年产量50万套,相当于每天5个集装箱以上水平。产品质量和生产率在国内名列前茅。

公司拥有雄厚的研发能力,拥有15项专利,通过ISO9001:2015质量管理体系认证、ISO14001:2015环境管理体系认证、职业健康安全体系认证,并获得欧盟CE(EN442)认证,力争打造国内、国际高端供暖市场一流品牌。



50,000 sets

Annual output of radiator
散热器年产量

The company was initially established in Tianjin Ninghe Economic Development Zone, China in 1998. Our factory spans an area of 45000 square meters with a total investment exceeding 50 million yuan. As a professional radiator manufacturing enterprise designated by the Chinese Ministry of Construction, Jiuding has been recognized as the leader in the industry through the joint efforts of the Jiuding team and our unwavering commitment to excellence. Our designer radiators have been exported to Europe, North America, the Middle East, and Russia, as well as sold to over 80 provinces and cities throughout China. The products have always been highly favored by our customers with their high-end, luxurious, fashionable, and user-friendly features.

Our factory possess five fully automatic production lines, all of which use Japanese Panasonic welding machines and Swiss Gema powder guns. The welding positions are firm and uniform, as well as the finish of paint is dense and smooth. Currently, our annual output of the designer radiators is 500,000 sets per year, equivalent to a level of more than 5 containers per day. After years of efforts, the product quality and productivity of Jiuding are among the best in the domestic industry.

Our company has strong R&D capabilities. With 15 patents, we have obtained Certifications for the ISO9001:2015 Quality Management System, the ISO14001:2015 Environmental Management System, the Occupational Health and Safety System, and European Union CE (EN442) certification. We committed to continue building a first-class brand in the domestic and international high-end heating market.

15 items

patent
专利

ENTERPRISE GLORIES

公司荣誉

Throughout the years, our factory has maintained a leading position in the heating radiator industry. Our products have enjoyed a good reputation in the market. So far, we have obtained 15 patented technologies and the following certifications:

一直以来,我们工厂在取暖行业占据领先地位,我们的产品享誉良好口碑。到目前为止,我们已获得15项专利技术并获得如下证书:



Demonstration Unit of Integrity
诚信经营示范企业



Credit Rating Certificate
资信等级证书



Certificate for honoring contract and keeping promise
重合同守信用证书



Quality Management Certificate
质量管理体系认证



Environment Management Certificate
环境管理体系认证



OHS Management Certificate
职业健康安全证书



CE Certificate
CE证书



UKCA
英国UKCA认证

SERIES 01.

Designer Radiator


— 搭焊系列



JD25Y

Single / Double Panel

Common Colors
常用颜色



white anthracite black

Finish
表面效果



亮光 哑光 磨砂

* Product color accept customization 产品颜色接受定制

Profile ▾

○ Φ35 ○ Φ25Y



Code	Height	Width	Depth	S/D	Pipes	EN442 (ΔT=50°)	
产品编码	高度 (mm)	宽度 (mm)	厚度 (mm)	单搭/双搭	柱数	Watt	BTU
JD25YDD 10/600	600	410	90	Double	10	576	1966
JD25YDD 16/600	600	638	90	Double	16	922	3148
JD25YSD 6/600	600	258	70	Single	6	449	1533
JD25YDD 6/600	600	258	90	Double	6	769	2625
JD25YSD 10/1500	1500	410	70	Single	10	749	2557
JD25YDD 10/1500	1500	410	90	Double	10	1282	4377
JD25YSD 6/1500	1500	258	70	Single	6	536	1830
JD25YDD 6/1800	1800	258	90	Double	6	886	3025
JD25YSD 10/1800	1800	410	70	Single	10	893	3049
JD25YDD 10/1800	1800	410	90	Double	10	1476	5039

The output above is for reference only, and the exact data should be based on the test.



JD25/28

Single / Double Panel

Common Colors

常用颜色



white anthracite black

Finish

表面效果



亮光 哑光 磨砂

* Product color accept customization 产品颜色接受定制

Profile ▾

○ $\phi 35$ □ $\phi 25 * 28$



Code	Height	Width	Depth	S/D	Pipes	EN442 ($\Delta T=50^\circ$)	
产品编码	高度(mm)	宽度(mm)	厚度(mm)	单搭/双搭	柱数	Watt	BTU
JD2528DD 10/600	600	383	87	Double	10	641	2188
JD2528DD 16/600	600	611	87	Double	16	1010	3446
JD2528DD 22/600	600	839	87	Double	22	1378	4705
JD2528SD 6/1500	1500	231	61	Single	6	474	1617
JD2528DD 6/1500	1500	231	87	Double	6	914	3120
JD2528SD 10/1500	1500	383	61	Single	10	772	2636
JD2528DD 10/1500	1500	383	87	Double	10	1496	5105
JD2528SD 12/1500	1500	459	61	Single	12	921	3143
JD2528DD 12/1500	1500	459	87	Double	12	1786	6096
JD2528SD 6/1800	1800	231	61	Single	6	558	1904
JD2528DD 6/1800	1800	231	87	Double	6	1092	3727
JD2528SD 10/1800	1800	383	61	Single	10	922	3146
JD2528DD 10/1800	1800	383	87	Double	10	1785	6093
JD2528SD 16/1800	1800	611	61	Single	16	1453	4960
JD2528DD 16/1800	1800	611	87	Double	16	2824	9641



Common Colors

常用颜色



white anthracite black

Finish

表面效果



亮光 哑光 磨砂


* Product color accept customization 产品颜色接受定制

JD30F

Single / Double Panel

Profile ▾

○ Φ35 □ Φ30 * 30

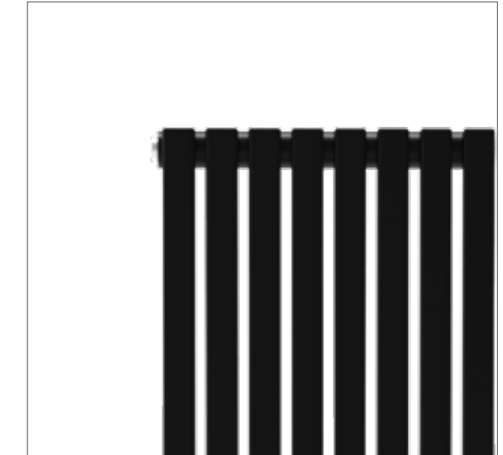

Code	Height	Width	Depth	S/D	Pipes	EN442 (ΔT=50°)	
产品编码	高度 (mm)	宽度 (mm)	厚度 (mm)	单搭/双搭	柱数	Watt	BTU
JD30FSD	600	345	65	Single	8	285	972
JD30FSD	600	431	65	Single	10	356	1215
JD30FSD	1200	173	65	Single	4	270	923
JD30FSD	1200	259	65	Single	6	406	1384
JD30FSD	1200	345	65	Single	8	541	1845
JD30FSD	1200	431	65	Single	10	676	2307
JD30FSD	1800	173	65	Single	4	397	1354
JD30FSD	1800	259	65	Single	6	595	2031
JD30FSD	1800	345	65	Single	8	794	2708
JD30FSD	1800	431	65	Single	10	992	3385
JD30FDD	600	345	95	Double	8	442	1507
JD30FDD	600	431	95	Double	10	552	1883
JD30FDD	1200	173	95	Double	4	413	1411
JD30FDD	1200	259	95	Double	6	620	2116
JD30FDD	1200	345	95	Double	8	827	2821
JD30FDD	1200	431	95	Double	10	1034	3527
JD30FDD	1800	173	95	Double	4	595	2031
JD30FDD	1800	259	95	Double	6	893	3046
JD30FDD	1800	345	95	Double	8	1190	4062
JD30FDD	1800	431	95	Double	10	1488	5077

JD30/15

Single / Double Panel

Common Colors
常用颜色



Finish
表面效果




* Product color accept customization 产品颜色接受定制



Profile ▾

○ Φ35 □ Φ30 * 15

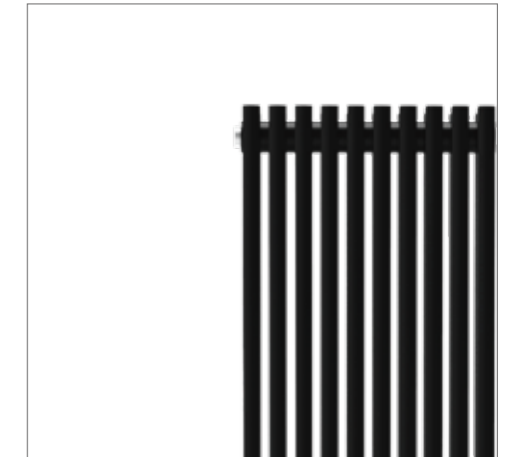

Code	Height	Width	Depth	S/D	Pipes	EN442 (ΔT=50°)	
产品编码	高度 (mm)	宽度 (mm)	厚度 (mm)	单搭/双搭	柱数	Watt	BTU
JD3015SD	600	204	65	Single	8	214	729
JD3015SD	600	254	65	Single	10	267	911
JD3015SD	1200	104	65	Single	4	203	692
JD3015SD	1200	154	65	Single	6	304	1038
JD3015SD	1200	204	65	Single	8	406	1384
JD3015SD	1200	254	65	Single	10	507	1730
JD3015SD	1800	104	65	Single	4	298	1016
JD3015SD	1800	154	65	Single	6	446	1523
JD3015SD	1800	204	65	Single	8	595	2031
JD3015SD	1800	254	65	Single	10	744	2539
JD3015DD	600	204	95	Double	8	331	1130
JD3015DD	600	254	95	Double	10	414	1413
JD3015DD	1200	104	95	Double	4	310	1058
JD3015DD	1200	154	95	Double	6	465	1587
JD3015DD	1200	204	95	Double	8	620	2116
JD3015DD	1200	254	95	Double	10	775	2645
JD3015DD	1800	104	95	Double	4	446	1523
JD3015DD	1800	154	95	Double	6	670	2285
JD3015DD	1800	204	95	Double	8	893	3046
JD3015DD	1800	254	95	Double	10	1116	3807

The output above is for reference only, and the exact data should be based on the test.



Common Colors

常用颜色



white anthracite black

Finish

表面效果



亮光 哑光 磨砂

* Product color accept customization 产品颜色接受定制

JD40/12L

Single / Double Panel

Profile ▾

○ Φ35 ◻ Φ40 * 12



Code	Height	Width	Depth	S/D	Pipes	EN442 (ΔT=50°)	
产品编码	高度 (mm)	宽度 (mm)	厚度 (mm)	单搭/双搭	柱数	Watt	BTU
JD4012SD	1500	106	75	Single	4	336	1148
JD4012SD	1500	156	75	Single	6	504	1721
JD4012SD	1500	206	75	Single	8	672	2295
JD4012SD	1500	256	75	Single	10	840	2869
JD4012SD	1500	306	75	Single	12	1008	3443
JD4012SD	1800	106	75	Single	4	412	1407
JD4012SD	1800	156	75	Single	6	618	2111
JD4012SD	1800	206	75	Single	8	824	2814
JD4012SD	1800	256	75	Single	10	1030	3518
JD4012DD	1500	106	75	Double	4	655	2239
JD4012DD	1500	156	75	Single	6	983	3356
JD4012DD	1500	206	75	Double	8	1310	4475
JD4012DD	1500	256	75	Double	10	1638	5595
JD4012DD	1500	306	75	Double	12	1966	6714
JD4012DD	1800	106	75	Double	4	803	2744
JD4012DD	1800	156	75	Double	6	1205	4116
JD4012DD	1800	206	75	Double	8	1607	5487
JD4012DD	1800	256	75	Double	10	2009	6860



Common Colors

常用颜色



white anthracite black

Finish

表面效果



亮光 哑光 磨砂

* Product color accept customization 产品颜色接受定制

JD40/15

Single / Double Panel

Profile ▾

○ $\Phi 35$ ☁ $\Phi 40 * 15$



Code	Height	Width	Depth	S/D	Pipes	EN442 ($\Delta T=50^\circ$)	
产品编码	高度(mm)	宽度(mm)	厚度(mm)	单搭/双搭	柱数	Watt	BTU
JD4015DD 8/600	600	427	61	Double	8	542	1848
JD4015DD 16/600	600	851	61	Double	16	1056	3605
JD4015DD 23/600	600	1222	61	Double	23	1507	5143
JD4015DD 5/1500	1500	268	61	Double	5	740	2525
JD4015SD 5/1500	1500	268	48	Single	5	400	1365
JD4015DD 7/1500	1500	374	61	Double	7	1036	3535
JD4015SD 7/1500	1500	374	48	Single	7	560	1911
JD4015DD 9/1500	1500	480	61	Double	9	1332	4545
JD4015SD 9/1500	1500	480	48	Single	9	720	2457
JD4015DD 5/1800	1800	268	61	Double	5	890	3037
JD4015SD 5/1800	1800	268	48	Single	5	480	1638
JD4015DD 7/1800	1800	374	61	Double	7	1246	4251
JD4015SD 7/1800	1800	374	48	Single	7	672	2293
JD4015DD 9/1800	1800	480	61	Double	9	1602	5466
JD4015SD 9/1800	1800	480	48	Single	9	864	2948
JD4015DD 11/1800	1800	586	61	Double	11	1958	6681
JD4015SD 5/2000	2000	268	48	Single	5	535	1825
JD4015SD 7/2000	2000	374	48	Single	7	749	2556

JD40

Single / Double Panel



Common Colors

常用颜色




white anthracite black

* Product color accept customization
产品颜色接受定制

Finish


表面效果



glossy reluster matte

亮光 哑光 磨砂

Profile ▾

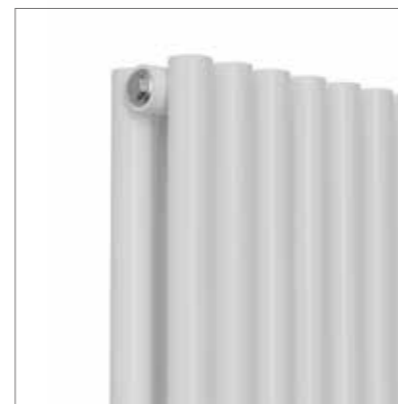

○ ϕ 35 ○ ϕ 40

Code	Height	Width	Depth	S/D	Pipes	EN442 ($\Delta T=50^\circ$)	
产品编码	高度 (mm)	宽度 (mm)	厚度 (mm)	单搭/双搭	柱数	Watt	BTU
JD40SD 6/1600	1600	394	70	Single	6	608	2076

JD50/25JZ

Single / Double Panel



○ ϕ 35 ○ ϕ 50 * 25

Common Colors

常用颜色




white anthracite black

* Product color accept customization
产品颜色接受定制

Finish

表面效果



glossy reluster matte

亮光 哑光 磨砂

Profile ▾



Code	Height	Width	Depth	S/D	Pipes	EN442 ($\Delta T=50^\circ$)	
产品编码	高度 (mm)	宽度 (mm)	厚度 (mm)	单搭/双搭	柱数	Watt	BTU
JD5025JZ-6	1800	504	58	Single	6+Mirror	888	3032



Common Colors

常用颜色



white anthracite black

Finish

表面效果



亮光 哑光 磨砂

* Product color accept customization 产品颜色接受定制

JD50/25

Single / Double Panel

Profile ▾

○ Φ35 ○ Φ50 * 25




Code	Height	Width	Depth	S/D	Pipes	EN442 (ΔT=50°)	
产品编码	高度(mm)	宽度(mm)	厚度(mm)	单搭/双搭	柱数	Watt	BTU
JD5025SD 10/600	600	593	58	Single	10	372	1270
JD5025DD 10/600	600	593	79	Double	10	752	2568
JD5025SD 17/600	600	1006	58	Single	17	633	2159
JD5025DD 17/600	600	1006	79	Double	17	1150	3926
JD5025SD 24/600	600	1419	58	Single	24	893	3048
JD5025DD 24/600	600	1419	79	Double	24	1085	6163
JD5025SD 6/1600	1600	357	58	Single	6	576	1965
JD5025DD 6/1600	1600	357	79	Double	6	1083	3696
JD5025SD 8/1600	1600	475	58	Single	8	768	2622
JD5025DD 8/1600	1600	475	79	Double	8	1444	4927
JD5025SD10/1600	1600	593	58	Single	10	960	3278
JD5025DD10/1600	1600	593	79	Double	10	1805	6159
JD5025SD 6/1800	1800	357	58	Single	6	684	2336
JD5025DD 6/1800	1800	357	79	Double	6	1220	4166
JD5025SD 8/1800	1800	475	58	Single	8	912	3114
JD5025DD 8/1800	1800	475	79	Double	8	1626	5551
JD5025SD10/1800	1800	593	58	Single	10	1140	3893
JD5025DD10/1800	1800	593	79	Double	10	2033	6939

JD50F

Single / Double Panel

Common Colors
常用颜色




* Product color accept customization 产品颜色接受定制

Finish
表面效果



Profile ▾

○ Φ35 □ Φ50 * 50

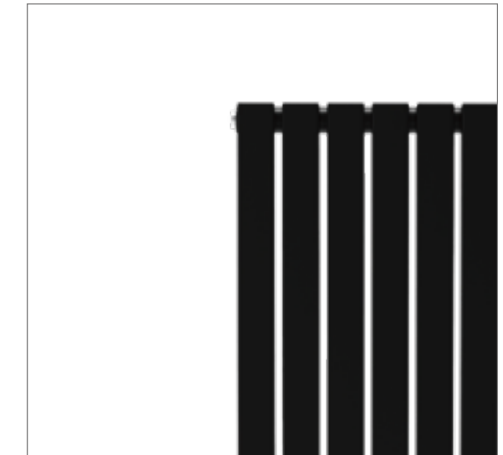

Code	Height	Width	Depth	S/D	Pipes	EN442 (ΔT=50°)	
产品编码	高度 (mm)	宽度 (mm)	厚度 (mm)	单搭/双搭	柱数	Watt	BTU
JD50FSD	600	484	85	Single	8	475	1620
JD50FSD	600	604	85	Single	10	593	2024
JD50FSD	1200	244	85	Single	4	451	1538
JD50FSD	1200	364	85	Single	6	676	2307
JD50FSD	1200	484	85	Single	8	901	3075
JD50FSD	1200	604	85	Single	10	1127	3844
JD50FSD	1800	244	85	Single	4	661	2256
JD50FSD	1800	364	85	Single	6	992	3385
JD50FSD	1800	484	85	Single	8	1323	4513
JD50FSD	1800	604	85	Single	10	1653	5641
JD50FDD	600	484	135	Double	8	736	2511
JD50FDD	600	604	135	Double	10	920	3139
JD50FDD	1200	244	135	Double	4	689	2351
JD50FDD	1200	364	135	Double	6	1034	3527
JD50FDD	1200	484	135	Double	8	1378	4702
JD50FDD	1200	604	135	Double	10	1723	5878
JD50FDD	1800	244	135	Double	4	992	3385
JD50FDD	1800	364	135	Double	6	1488	5077
JD50FDD	1800	484	135	Double	8	1984	6769
JD50FDD	1800	604	135	Double	10	2480	8462

The output above is for reference only, and the exact data should be based on the test.



Common Colors

常用颜色



white anthracite black

Finish

表面效果



亮光 哑光 磨砂

* Product color accept customization 产品颜色接受定制

JD50Y

Single / Double Panel

The output above is for reference only, and the exact data should be based on the test.

Profile ▾

○ Φ35 ○ Φ50Y



Code	Height	Width	Depth	S/D	Pipes	EN442 (ΔT=50°)	
产品编码	高度 (mm)	宽度 (mm)	厚度 (mm)	单搭/双搭	柱数	Watt	BTU
JD50YSD	600	484	85	Single	8	373	1273
JD50YSD	600	604	85	Single	10	466	1591
JD50YSD	1200	244	85	Single	4	354	1208
JD50YSD	1200	364	85	Single	6	531	1812
JD50YSD	1200	484	85	Single	8	708	2416
JD50YSD	1200	604	85	Single	10	885	3020
JD50YSD	1800	244	85	Single	4	520	1774
JD50YSD	1800	364	85	Single	6	779	2658
JD50YSD	1800	484	85	Single	8	1039	3546
JD50YSD	1800	604	85	Single	10	1299	4433
JD50YDD	600	484	135	Double	8	578	1972
JD50YDD	600	604	135	Double	10	723	2467
JD50YDD	1200	244	135	Double	4	541	1846
JD50YDD	1200	364	135	Double	6	812	2771
JD50YDD	1200	484	135	Double	8	1082	3693
JD50YDD	1200	604	135	Double	10	1353	4617
JD50YDD	1800	244	135	Double	4	779	2658
JD50YDD	1800	364	135	Double	6	1169	3990
JD50YDD	1800	484	135	Double	8	1559	5320
JD50YDD	1800	604	135	Double	10	1948	6648

The output above is for reference only, and the exact data should be based on the test.



Common Colors

常用颜色



white anthracite black

Finish

表面效果



亮光 哑光 磨砂

* Product color accept customization 产品颜色接受定制

JD60/15

Single / Double Panel

Profile ▾

○ $\phi 35$ ☁ $\phi 60 * 15$



Code	Height	Width	Depth	S/D	Pipes	EN442 ($\Delta T=50^\circ$)	
产品编码	高度 (mm)	宽度 (mm)	厚度 (mm)	单搭/双搭	柱数	Watt	BTU
JD6015SD 9/600	600	615	48	Single	9	387	1320
JD6015DD 9/600	600	615	61	Double	9	819	2795
JD6015SD 15/600	600	1023	48	Single	15	645	2201
JD6015DD 15/600	600	1023	61	Double	15	1364	4657
JD6015SD 21/600	600	1431	48	Single	21	903	3081
JD6015DD 21/600	600	1431	61	Double	21	1910	6521
JD6015SD 5/1800	1800	343	48	Single	5	540	1843
JD6015DD 5/1800	1800	343	61	Double	5	1095	3737
JD6015SD 6/1800	1800	411	48	Single	6	648	2212
JD6015DD 6/1800	1800	411	61	Double	6	1314	4486
JD6015SD 8/1800	1800	547	48	Single	8	864	2949
JD6015DD 8/1800	1800	547	61	Double	8	1752	5980



Common Colors

常用颜色



white anthracite black

Finish

表面效果



glossy reluster matte
亮光 哑光 磨砂

* Product color accept customization 产品颜色接受定制

JD60/30

Single / Double Panel

The output above is for reference only, and the exact data should be based on the test.


Profile ▾

○ Φ35 □ Φ60 * 30



Code	Height	Width	Depth	S/D	Pipes	EN442 (ΔT=50°)	
产品编码	高度 (mm)	宽度 (mm)	厚度 (mm)	单搭/双搭	柱数	Watt	BTU
JD6030SD	600	564	65	Single	8	427	1457
JD6030SD	600	704	65	Single	10	534	1821
JD6030SD	1200	284	65	Single	4	406	1384
JD6030SD	1200	424	65	Single	6	608	2076
JD6030SD	1200	564	65	Single	8	811	2768
JD6030SD	1200	704	65	Single	10	1014	3461
JD6030SD	1800	284	65	Single	4	595	2031
JD6030SD	1800	424	65	Single	6	893	3046
JD6030SD	1800	564	65	Single	8	1190	4062
JD6030SD	1800	704	65	Single	10	1488	5077
JD6030DD	600	564	95	Double	8	662	2260
JD6030DD	600	704	95	Double	10	828	2825
JD6030DD	1200	284	95	Double	4	620	2116
JD6030DD	1200	424	95	Double	6	930	3174
JD6030DD	1200	564	95	Double	8	1240	4232
JD6030DD	1200	704	95	Double	10	1550	5290
JD6030DD	1800	284	95	Double	4	893	3046
JD6030DD	1800	424	95	Double	6	1339	4569
JD6030DD	1800	564	95	Double	8	1786	6092
JD6030DD	1800	704	95	Double	10	2232	7616

The output above is for reference only, and the exact data should be based on the test.

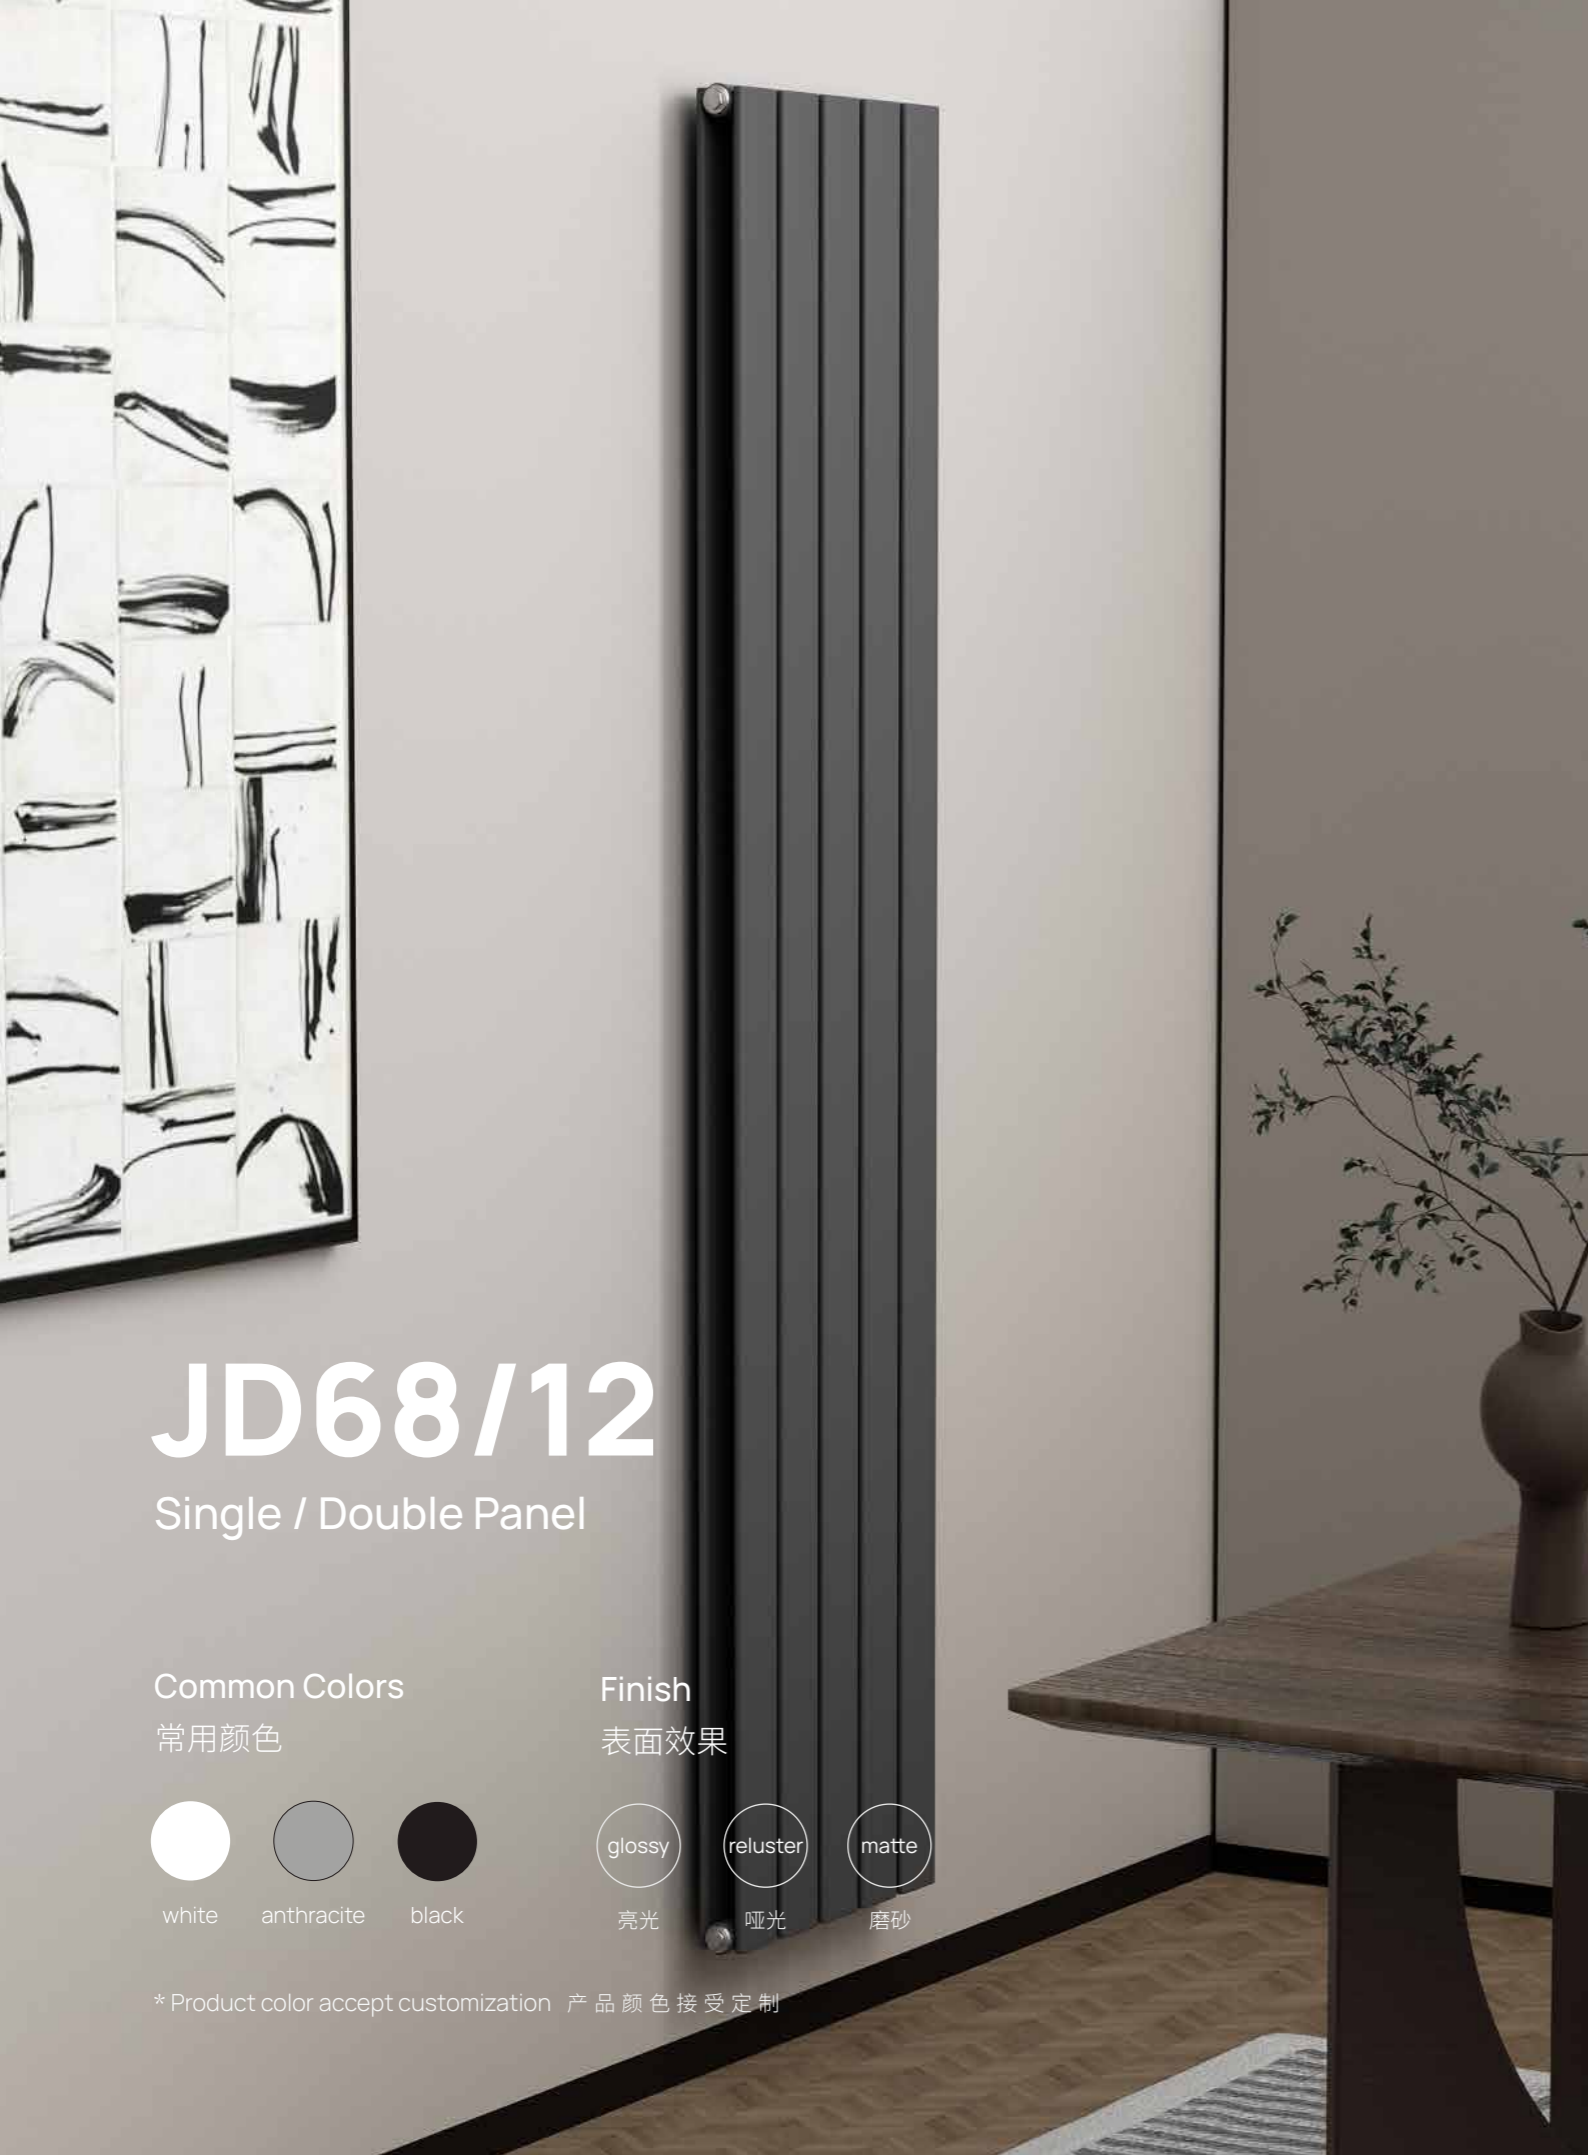

JD68/12

Single / Double Panel

Common Colors
常用颜色



white anthracite black

Finish
表面效果



亮光 哑光 磨砂

* Product color accept customization 产品颜色接受定制

Profile ▾

○ $\Phi 35$ □ $\Phi 68 * 12$



Code	Height	Width	Depth	S/D	Pipes	EN442 ($\Delta T=50^\circ$)	
产品编码	高度(mm)	宽度(mm)	厚度(mm)	单搭/双搭	柱数	Watt	BTU
JD6812SD 8/600	600	619	50	Single	8	415	1418
JD6812DD 8/600	600	619	65	Double	8	722	2465
JD6812SD 13/600	600	1004	50	Single	13	646	2206
JD6812DD 13/600	600	1004	65	Double	13	1192	4071
JD6812SD 21/600	600	1620	50	Single	21	1047	3576
JD6812DD 21/600	600	1620	65	Double	21	1909	6518
JD6812SD 4/1600	1600	311	50	Single	4	481	1642
JD6812DD 4/1600	1600	311	65	Double	4	912	3114
JD6812SD 6/1600	1600	465	50	Single	6	721	2462
JD6812DD 6/1600	1600	465	65	Double	6	1377	4701
JD6812SD 8/1600	1600	619	50	Single	8	978	3340
JD6812DD 8/1600	1600	619	65	Double	8	1860	6350
JD6812SD 4/1800	1800	311	50	Single	4	525	1793
JD6812DD 4/1800	1800	311	65	Double	4	1041	3554
JD6812SD 6/1800	1800	465	50	Single	6	783	2673
JD6812DD 6/1800	1800	465	65	Double	6	1562	5333
JD6812SD 8/1800	1800	619	50	Single	8	1048	3578
JD6812DD 8/1800	1800	619	65	Double	8	2099	7166



Common Colors

常用颜色



white anthracite black

Finish

表面效果



亮光 哑光 磨砂

* Product color accept customization 产品颜色接受定制

JD70/15

Single / Double Panel

Profile ▾

○ $\phi 35$ ☁ $\phi 70 * 15$



Code	Height	Width	Depth	S/D	Pipes	EN442 ($\Delta T=50^\circ$)	
产品编码	高度(mm)	宽度(mm)	厚度(mm)	单搭/双搭	柱数	Watt	BTU
JD7015SD 8/600	600	619	48	Single	8	432	1475
JD7015DD 8/600	600	619	61	Double	8	740	2527
JD7015SD 13/600	600	1004	48	Single	13	656	2240
JD7015DD 13/600	600	1004	61	Double	13	1212	4138
JD7015SD 21/600	600	1620	48	Single	21	1059	3614
JD7015DD 21/600	600	1620	61	Double	21	1941	6626
JD7015SD 4/1600	1600	311	48	Single	4	497	1697
JD7015DD 4/1600	1600	311	61	Double	4	938	3202
JD7015SD 6/1600	1600	465	48	Single	6	744	2541
JD7015DD 6/1600	1600	465	61	Double	6	1407	4803
JD7015SD 8/1600	1600	619	48	Single	8	992	3388
JD7015DD 8/1600	1600	619	61	Double	8	1876	6405
JD7015SD 4/1800	1800	311	48	Single	4	536	1830
JD7015DD 4/1800	1800	311	61	Double	4	1066	3639
JD7015SD 6/1800	1800	465	48	Single	6	804	2745
JD7015DD 6/1800	1800	465	61	Double	6	1599	5458
JD7015SD 8/1800	1800	619	48	Single	8	1072	3660
JD7015DD 8/1800	1800	619	61	Double	8	2132	7277



JDSC

Single / Double Panel

Common Colors
常用颜色



white anthracite black

Finish
表面效果



亮光 哑光 磨砂

* Product color accept customization 产品颜色接受定制

Profile ▾

○ Φ35 ○ Φ40 * 12



Code	Height	Width	Depth	S/D	Pipes	EN442 (ΔT=50°)	
产品编码	高度(mm)	宽度(mm)	厚度(mm)	单搭/双搭	柱数	Watt	BTU
JDSC	1200	264	48	Single	4	304	1037
JDSC	1200	314	48	Single	5	380	1297
JDSC	1200	364	48	Single	6	457	1559
JDSC	1200	414	48	Single	7	533	1819
JDSC	1200	464	48	Single	8	609	2078
JDSC	1200	514	48	Single	9	685	2337
JDSC	1200	564	48	Single	10	761	2597
JDSC	1800	264	48	Single	4	444	1515
JDSC	1800	314	48	Single	5	555	1894
JDSC	1800	364	48	Single	6	666	2272
JDSC	1800	414	48	Single	7	777	2651
JDSC	1800	464	48	Single	8	888	3030
JDSC	1800	514	48	Single	9	999	3409
JDSC	1800	564	48	Single	10	1110	3787

SERIES

02.

Column Radiator

柱式系列



Common Colors

常用颜色




white anthracite black

* Product color accept customization
产品颜色接受定制

Finish

表面效果




亮光 哑光 磨砂

Profile ▾



Code	Height	Width	Depth	Pipes	EN442 ($\Delta T=50^\circ$)	
产品编码	高度 (mm)	宽度 (mm)	厚度 (mm)	柱数	Watt	BTU
JDGZ2 9/600	600	421	69	9	407	1389
JDGZ2 13/600	600	598	69	13	588	2007
JDGZ2 22/600	600	997	69	22	995	3398
JDGZ2 33/600	600	1484	69	33	1492	5094
JDGZ2 6/1500	1500	288	69	6	653	2229
JDGZ2 8/1500	1500	377	69	8	871	2974
JDGZ2 10/1500	1500	465	69	10	1088	3715
JDGZ2 8/1800	1800	377	69	8	1037	3540
JDGZ2 10/1800	1800	465	69	10	1296	4425
JDGZ2 12/1800	1800	554	69	12	1555	5310

The output above is for reference only, and the exact data should be based on the test.

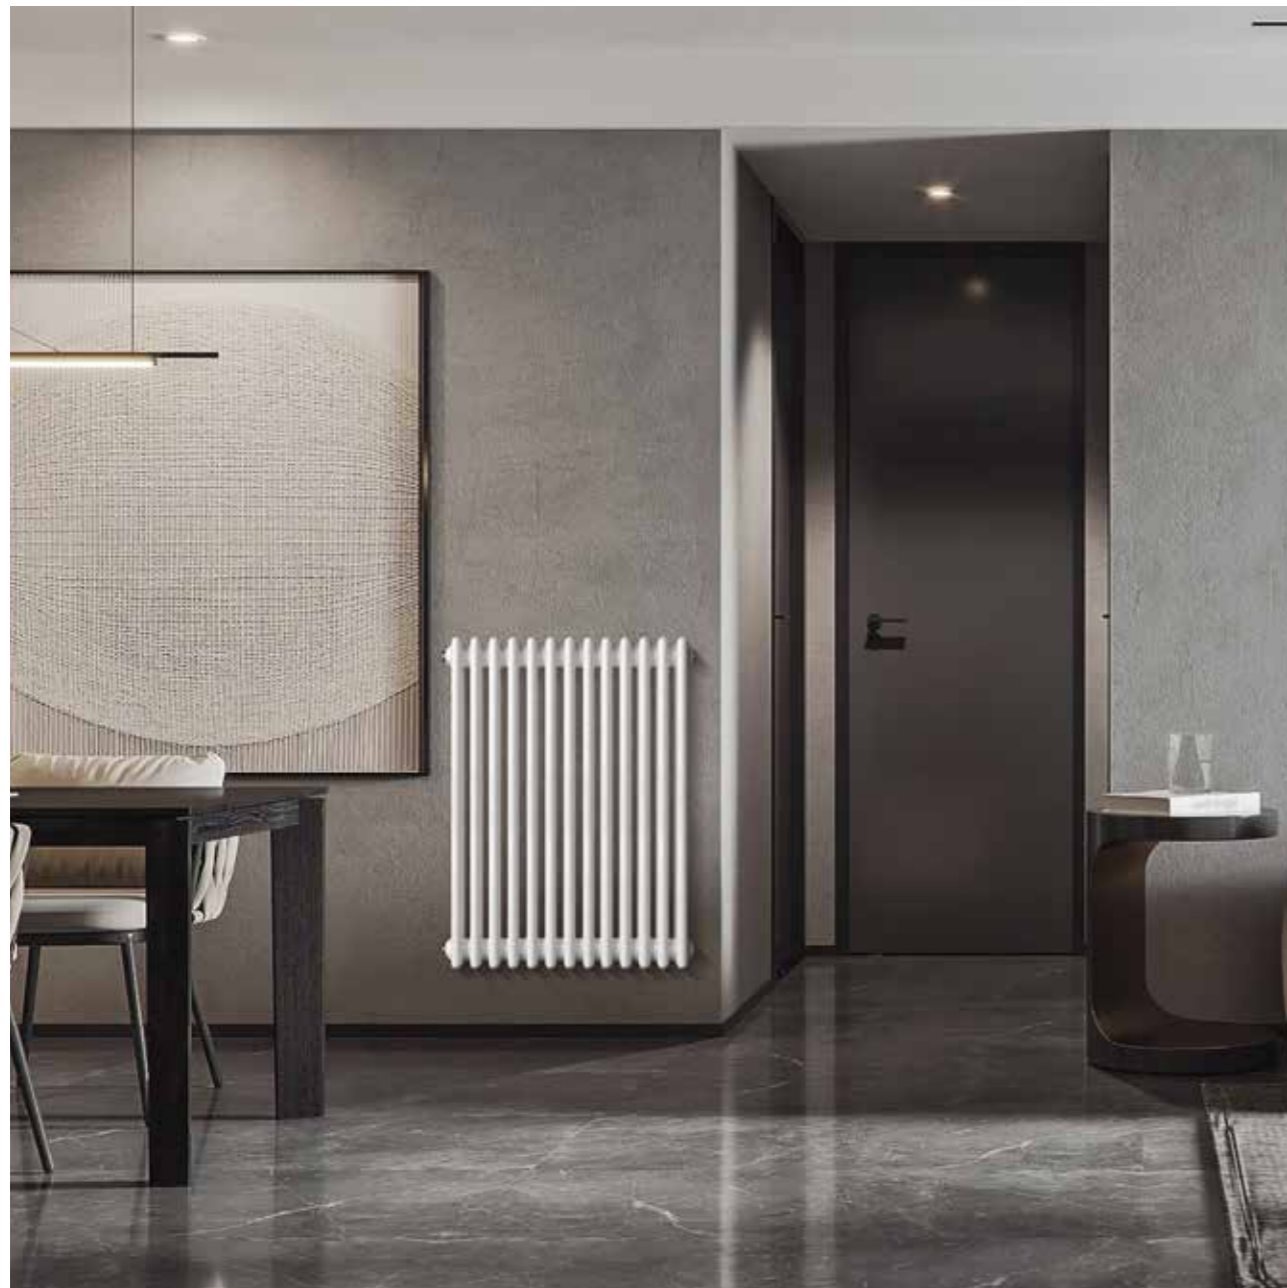

Common Colors

常用颜色



white anthracite black

Finish

表面效果



亮光 哑光 磨砂

* Product color accept customization 产品颜色接受定制

JDGZ3

Column Triple

Profile ▾

○ Φ25



Code	Height	Width	Depth	Pipes	EN442 (ΔT=50°)	
产品编码	高度 (mm)	宽度 (mm)	厚度 (mm)	柱数	Watt	BTU
JDGZ3 18/300	300	820	100	18	634	2165
JDGZ3 26/300	300	1174	100	26	916	3125
JDGZ3 33/300	300	1484	100	33	1162	3966
JDGZ3 13/600	600	598	100	13	858	2930
JDGZ3 22/600	600	997	100	22	1452	4958
JDGZ3 31/600	600	1396	100	31	2046	6985
JDGZ3 6/1500	1500	288	100	6	948	3237
JDGZ3 8/1500	1500	377	100	8	1264	4316
JDGZ3 10/1500	1500	465	100	10	1580	5395
JDGZ3 6/1800	1800	288	100	6	1152	3933
JDGZ3 8/1800	1800	377	100	8	1536	5244
JDGZ3 10/1800	1800	465	100	10	1920	6555

JDGZ4

Column Four

Common Colors
常用颜色



Finish
表面效果



* Product color accept customization 产品颜色接受定制



Profile ▾

○ $\Phi 25$



Code	Height	Width	Depth	Pipes	EN442 ($\Delta T=50^\circ$)	
产品编码	高度 (mm)	宽度 (mm)	厚度 (mm)	柱数	Watt	BTU
JDGZ4 18/300	300	819	138	18	794	2711
JDGZ4 22/300	300	997	138	22	970	3316
JDGZ4 26/300	300	1174	138	26	1146	3912
JDGZ4 32/300	300	1440	138	32	1410	4813
JDGZ4 9/600	600	421	138	9	704	2403
JDGZ4 13/600	600	598	138	13	1016	3469
JDGZ4 18/600	600	819	138	18	1406	4800
JDGZ4 22/600	600	997	138	22	1718	5865
JDGZ4 26/600	600	1174	138	26	2030	6930
JDGZ4 32/600	600	1440	138	32	2498	8528
JDGZ4 6/1500	1500	288	138	6	1116	3816
JDGZ4 8/1500	1500	376	138	8	1488	5088
JDGZ4 10/1500	1500	465	138	10	1860	6360
JDGZ4 4/1800	1800	199	138	4	894	3052
JDGZ4 6/1800	1800	288	138	6	1340	4575
JDGZ4 8/1800	1800	376	138	8	1786	6097

SERIES

03.

Towel Radiator

卫浴系列

JD30SLF



Common Colors

常用颜色



white


anthracite

black

* Product color accept customization
产品颜色接受定制

Finish

表面效果



亮光

哑光

磨砂

Profile ▾



Code	Height	Width	Depth	S/D	Pipes	EN442 ($\Delta T=50^\circ$)	
产品编码	高度(mm)	宽度(mm)	厚度(mm)	单搭/双搭	柱数	Watt	BTU
JD30SLF	1500	450	65	/	/	520	1776



Common Colors

常用颜色




white anthracite black

* Product color accept customization
产品颜色接受定制

Finish

表面效果



亮光 哑光 磨砂

Profile ▾



Common Colors

常用颜色



white anthracite black

* Product color accept customization
产品颜色接受定制

Finish

表面效果



亮光 哑光 磨砂

Profile ▾



Code	Height	Width	Depth	Pipes	EN442 (ΔT=50°)	
产品编码	高度 (mm)	宽度 (mm)	厚度 (mm)	柱数	Watt	BTU
JDWY 20/1000	1000	400	30	20 (4+6+10)	370	1264
	1000	500	30	20 (4+6+10)	463	1580
	1000	600	30	20 (4+6+10)	556	1896
JDWY 24/1200	1200	400	30	24(4+5+7+8)	442	1507
	1200	500	30	24(4+5+7+8)	552	1884
	1200	600	30	24(4+5+7+8)	663	2261
JDWY 30/1600	1600	400	30	30 (4+5+6+7+8)	585	1996
	1600	500	30	30 (4+5+6+7+8)	731	2495
	1600	600	30	30 (4+5+6+7+8)	877	2994
JDWY 34/1800	1800	400	30	34 (4+5+6+8+11)	706	2408
	1800	500	30	34 (4+5+6+8+11)	882	3010
	1800	600	30	34 (4+5+6+8+11)	1058	3612

The output above is for reference only, and the exact data should be based on the test.

Code	Height	Width	Depth	Pipes	EN442 (ΔT=50°)	
产品编码	高度 (mm)	宽度 (mm)	厚度 (mm)	柱数	Watt	BTU
JDWY 20/1000	1000	400	30	20 (4+6+10)	370	1264
	1000	500	30	20 (4+6+10)	463	1580
	1000	600	30	20 (4+6+10)	556	1896
JDWY 24/1200	1200	400	30	24(4+5+7+8)	442	1507
	1200	500	30	24(4+5+7+8)	552	1884
	1200	600	30	24(4+5+7+8)	663	2261
JDWY 30/1600	1600	400	30	30 (4+5+6+7+8)	585	1996
	1600	500	30	30 (4+5+6+7+8)	731	2495
	1600	600	30	30 (4+5+6+7+8)	877	2994
JDWY 34/1800	1800	400	30	34 (4+5+6+8+11)	706	2408
	1800	500	30	34 (4+5+6+8+11)	882	3010
	1800	600	30	34 (4+5+6+8+11)	1058	3612

The output above is for reference only, and the exact data should be based on the test.

JD60/15DF



○ $\phi 35$ ☁ $\phi 60 * 15$

Common Colors

常用颜色



white anthracite black

* Product color accept customization
产品颜色接受定制


Finish

表面效果



glossy reluster matte
亮光 哑光 磨砂

Profile ▾

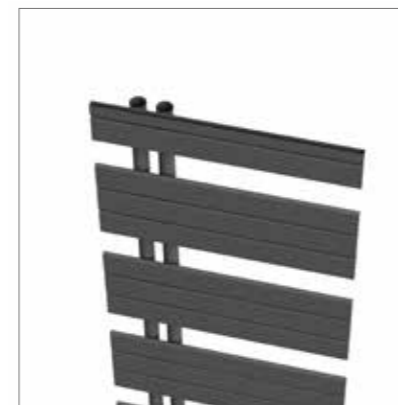

SERIES 04.

Bimetal Radiator

—
铜铝系列

Code	Height	Width	Depth	S/D	Pipes	EN442 ($\Delta T=50^\circ$)	
产品编码	高度(mm)	宽度(mm)	厚度(mm)	单搭/双搭	柱数	Watt	BTU
JD6015DF 1314	1314	500	62	Single	15	500	1707
	1314	600	62	Single	15	600	2048
JD6015DF 1590	1590	600	62	Single	18	720	2458



JD75/75TL

Common Colors

常用颜色




white anthracite black

* Product color accept customization
产品颜色接受定制

Finish

表面效果



glossy reluster matte

亮光 哑光 磨砂

Profile ▾



Code	Height	Width	Depth	Pipes	EN442 (ΔT=50°)	
产品编码	高度(mm)	宽度(mm)	厚度(mm)	柱数	Watt	BTU
JD75TL 6/600	600	500	75	6	673	2297
JD75TL 8/600	600	660	75	8	899	3071
JD75TL 10/600	600	820	75	10	1123	3835
JD75TL 4/1800	1800	340	75	4	977	3336
JD75TL 5/1800	1800	420	75	5	1220	4165
JD75TL 6/1800	1800	500	75	6	1465	5002



JD132/60TL

Common Colors

常用颜色




white anthracite black

* Product color accept customization
产品颜色接受定制

Finish

表面效果



glossy reluster matte

亮光 哑光 磨砂

Profile ▾



Code	Height	Width	Depth	Pipes	EN442 (ΔT=50°)	
产品编码	高度(mm)	宽度(mm)	厚度(mm)	柱数	Watt	BTU
JD132/60TL 5/600	600	720	60	5	832	2840
JD132/60TL 6/600	600	860	60	6	998	3407
JD132/60TL 7/600	600	1000	60	7	1164	3974
JD132/60TL 3/1800	1800	440	60	3	1168	3988
JD132/60TL 4/1800	1800	580	60	4	1558	5319
JD132/60TL 5/1800	1800	720	60	5	1947	6647



Common Colors

常用颜色




white anthracite black

* Product color accept customization
产品颜色接受定制

Finish

表面效果



亮光 哑光 磨砂

Profile ▾



SERIES
05.

Panel Radiator

—
板式系列

Code	Height	Width	Depth	Pipes	EN442 ($\Delta T=50^\circ$)	
产品编码	高度(mm)	宽度(mm)	厚度(mm)	柱数	Watt	BTU
JD80TL 5/600	600	542	80	6	740	2527
JD80TL 6/600	600	716	80	8	989	3378
JD80TL 7/600	600	890	80	10	1235	4219
JD80TL 3/1800	1800	368	80	4	1075	3670
JD80TL 4/1800	1800	455	80	5	1342	4582
JD80TL 5/1800	1800	542	80	6	1612	5502

Bottom entry tee-accessories

底进三通-配件



Installation method

安装方式



单面挂
Single-sided installation




双面挂
Double-sided installation



地支架
Floor bracket

Panel Radiator High-Panel Radiator High (mm)

板式系列-高度

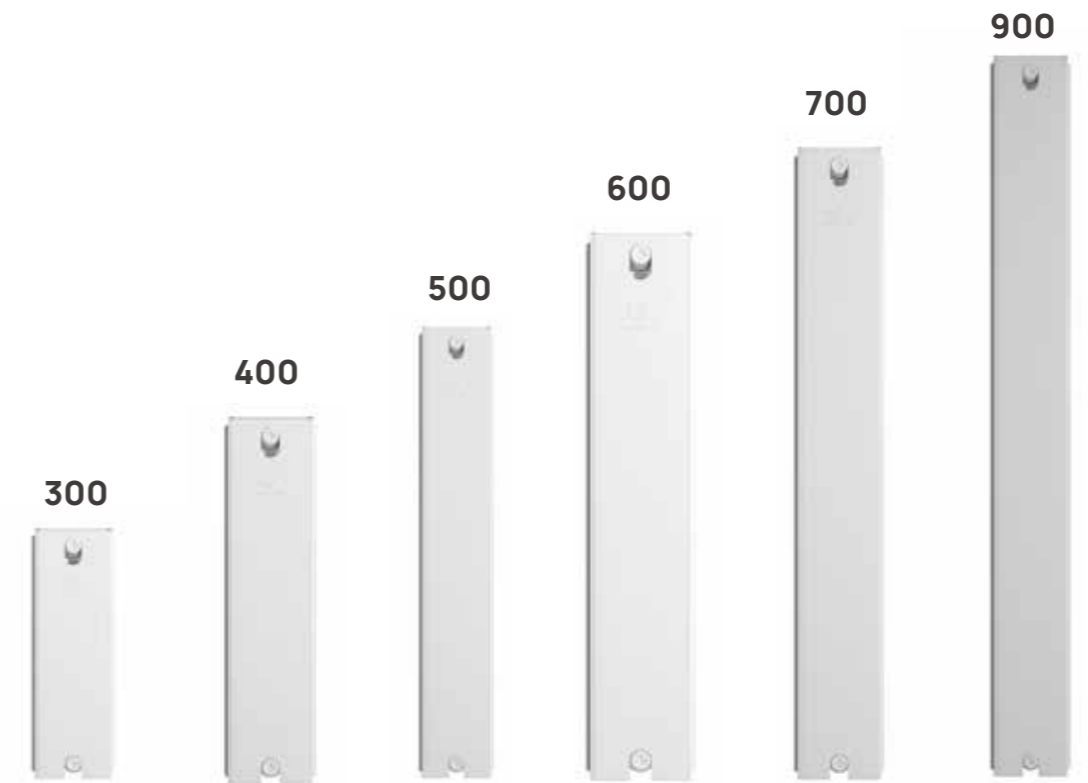



Common Colors

常用颜色




cool white off white ivory

* Product color accept customization 产品颜色接受定制

Finish

表面效果



glossy
亮光

JD-11K

试验压力
Test pressure

13Bar

Code	Height	Width	Depth	Center To Center	Power	Heating Area
型号	高度 (mm)	宽度 (mm)	深度 (mm)	中心到中心 (mm)	功率 (w)	供暖面积 (m²)
C11-300-500	300	500	60	250	388	3.9
C11-300-600	300	600	60	250	466	4.7
C11-300-700	300	700	60	250	544	5.4
C11-300-800	300	800	60	250	622	6.2
C11-300-900	300	900	60	250	699	7
C11-300-1000	300	1000	60	250	777	7.8
C11-300-1100	300	1100	60	250	855	8.6
C11-300-1200	300	1200	60	250	932	9.3
C11-300-1300	300	1300	60	250	1010	10.1
C11-300-1400	300	1400	60	250	1088	10.9
C11-300-1500	300	1500	60	250	1165	11.7
C11-300-1600	300	1600	60	250	1243	12.4
C11-300-1700	300	1700	60	250	1321	13.2
C11-300-1800	300	1800	60	250	1398	14
C11-300-1900	300	1900	60	250	1476	14.8
C11-300-2000	300	2000	60	250	1554	15.5
C11-300-2100	300	2100	60	250	1632	16.3
C11-300-2200	300	2200	60	250	1709	17.1
C11-300-2300	300	2300	60	250	1787	17.9
C11-300-2400	300	2400	60	250	1865	18.7
C11-300-2500	300	2500	60	250	1942	19.4
C11-300-2600	300	2600	60	250	2020	20.2
C11-300-2700	300	2700	60	250	2098	21
C11-300-2800	300	2800	60	250	2175	21.8
C11-300-2900	300	2900	60	250	2253	22.5
C11-300-3000	300	3000	60	250	2331	23.3
C11-400-400	400	400	60	350	398	4
C11-400-500	400	500	60	350	498	5
C11-400-600	400	600	60	350	597	6
C11-400-700	400	700	60	350	697	7
C11-400-800	400	800	60	350	797	8
C11-400-900	400	900	60	350	896	9
C11-400-1000	400	1000	60	350	996	10
C11-400-1100	400	1100	60	350	1095	11
C11-400-1200	400	1200	60	350	1195	12
C11-400-1300	400	1300	60	350	1294	12.9
C11-400-1400	400	1400	60	350	1394	13.9
C11-400-1500	400	1500	60	350	1493	14.9
C11-400-1600	400	1600	60	350	1593	15.9
C11-400-1700	400	1700	60	350	1693	16.9
C11-400-1800	400	1800	60	350	1792	17.9
C11-400-1900	400	1900	60	350	1892	18.9
C11-400-2000	400	2000	60	350	1991	19.9
C11-400-2100	400	2100	60	350	2091	20.9

Code	Height	Width	Depth	Center To Center	Power	Heating Area
型号	高度 (mm)	宽度 (mm)	深度 (mm)	中心到中心 (mm)	功率 (w)	供暖面积 (m ²)
C11-400-2200	400	2200	60	350	2190	21.9
C11-400-2300	400	2300	60	350	2290	22.9
C11-400-2400	400	2400	60	350	2390	23.9
C11-400-2500	400	2500	60	350	2490	24.9
C11-400-2600	400	2600	60	350	2589	25.9
C11-400-2700	400	2700	60	350	2689	26.9
C11-400-2800	400	2800	60	350	2788	27.9
C11-400-2900	400	2900	60	350	2888	28.9
C11-400-3000	400	3000	60	350	2987	29.9
C11-500-400	500	400	60	450	480	4.8
C11-500-500	500	500	60	450	600	6
C11-500-600	500	600	60	450	720	7.2
C11-500-700	500	700	60	450	840	8.4
C11-500-800	500	800	60	450	960	9.6
C11-500-900	500	900	60	450	1080	10.8
C11-500-1000	500	1000	60	450	1200	12
C11-500-1100	500	1100	60	450	1320	13.2
C11-500-1200	500	1200	60	450	1440	14.4
C11-500-1300	500	1300	60	450	1560	15.6
C11-500-1400	500	1400	60	450	1680	16.8
C11-500-1500	500	1500	60	450	1800	18
C11-500-1600	500	1600	60	450	1920	19.2
C11-500-1700	500	1700	60	450	2040	20.4
C11-500-1800	500	1800	60	450	2160	21.6
C11-500-1900	500	1900	60	450	2280	22.8
C11-500-2000	500	2000	60	450	2400	24
C11-500-2100	500	2100	60	450	2520	25.2
C11-500-2200	500	2200	60	450	2640	26.4
C11-500-2300	500	2300	60	450	2760	27.6
C11-500-2400	500	2400	60	450	2880	28.8
C11-500-2500	500	2500	60	450	3000	30
C11-500-2600	500	2600	60	450	3120	31.2
C11-500-2700	500	2700	60	450	3240	32.4
C11-500-2800	500	2800	60	450	3360	33.6
C11-500-2900	500	2900	60	450	3480	34.8
C11-500-3000	500	3000	60	450	3600	36
C11-600-400	600	400	60	550	561	5.61
C11-600-500	600	500	60	550	701	7.01
C11-600-600	600	600	60	550	841	8.41
C11-600-700	600	700	60	550	980	9.8
C11-600-800	600	800	60	550	1120	11.2
C11-600-900	600	900	60	550	1260	12.6
C11-600-1000	600	1000	60	550	1400	14
C11-600-1100	600	1100	60	550	1540	15.4

C11-600-1200	600	1200	60	550	1680	16.8
C11-600-1300	600	1300	60	550	1820	18.2
C11-600-1400	600	1400	60	550	1960	19.6
C11-600-1500	600	1500	60	550	2100	21
C11-600-1600	600	1600	60	550	2240	22.4
C11-600-1700	600	1700	60	550	2380	23.8
C11-600-1800	600	1800	60	550	2520	25.2
C11-600-1900	600	1900	60	550	2660	26.6
C11-600-2000	600	2000	60	550	2800	28
C11-600-2100	600	2100	60	550	2940	29.4
C11-600-2200	600	2200	60	550	3080	30.8
C11-600-2300	600	2300	60	550	3220	32.2
C11-600-2400	600	2400	60	550	3360	33.6
C11-600-2500	600	2500	60	550	3500	35
C11-600-2600	600	2600	60	550	3640	36.4
C11-600-2700	600	2700	60	550	3780	37.8
C11-600-2800	600	2800	60	550	3920	39.2
C11-600-2900	600	2900	60	550	4060	40.6
C11-600-3000	600	3000	60	550	4200	42
C11-900-400	900	400	60	550	776	7.8
C11-900-500	900	500	60	850	970	9.7
C11-900-600	900	600	60	850	1164	11.6
C11-900-700	900	700	60	850	1358	13.6
C11-900-800	900	800	60	850	1552	15.5
C11-900-900	900	900	60	850	1746	17.5
C11-900-1000	900	1000	60	850	1940	19.4
C11-900-1100	900	1100	60	850	2134	21.3
C11-900-1200	900	1200	60	850	2328	23.3
C11-900-1300	900	1300	60	850	2522	25.2
C11-900-1400	900	1400	60	850	2716	27.2
C11-900-1500	900	1500	60	850	2910	29.1
C11-900-1600	900	1600	60	850	3104	31
C11-900-1700	900	1700	60	850	3298	33
C11-900-1800	900	1800	60	850	3492	34.9
C11-900-1900	900	1900	60	850	3686	36.9
C11-900-2000	900	2000	60	850	3880	38.8
C11-900-2100	900	2100	60	850	4074	40.7
C11-900-2200	900	2200	60	850	4268	42.7
C11-900-2300	900	2300	60	850	4462	44.6
C11-900-2400	900	2400	60	850	4656	46.6
C11-900-2500	900	2500	60	850	4850	48.5
C11-900-2600	900	2600	60	850	5044	50.4
C11-900-2700	900	2700	60	850	5238	52.4
C11-900-2800	900	2800	60	850	5432	54.3
C11-900-2900	900	2900	60	850	5626	56.3
C11-900-3000	900	3000	60	850	5820	58.2



Common Colors


常用颜色



cool white off white ivory

Finish

表面效果



glossy
亮光

* Product color accept customization 产品颜色接受定制

JD-21K

试验压力
Test pressure

13Bar

Code	Height	Width	Depth	Center To Center	Power	Heating Area
型号	高度 (mm)	宽度 (mm)	深度 (mm)	中心到中心 (mm)	功率 (w)	供暖面积 (m ²)
C21-300-400	300	400	70	250	450	4.5
C21-300-500	300	500	70	250	563	5.6
C21-300-600	300	600	70	250	675	6.8
C21-300-700	300	700	70	250	788	7.9
C21-300-800	300	800	70	250	900	9.0
C21-300-900	300	900	70	250	1013	10.1
C21-300-1000	300	1000	70	250	1125	11.3
C21-300-1100	300	1100	70	250	1238	12.4
C21-300-1200	300	1200	70	250	1351	13.5
C21-300-1300	300	1300	70	250	1463	14.6
C21-300-1400	300	1400	70	250	1576	15.8
C21-300-1500	300	1500	70	250	1688	16.9
C21-300-1600	300	1600	70	250	1801	18.0
C21-300-1700	300	1700	70	250	1913	19.1
C21-300-1800	300	1800	70	250	2026	20.3
C21-300-1900	300	1900	70	250	2138	21.4
C21-300-2000	300	2000	70	250	2251	22.5
C21-300-2100	300	2100	70	250	2363	23.6
C21-300-2200	300	2200	70	250	2476	24.8
C21-300-2300	300	2300	70	250	2588	25.9
C21-300-2400	300	2400	70	250	2701	27.0
C21-300-2500	300	2500	70	250	2814	28.1
C21-300-2600	300	2600	70	250	2926	29.3
C21-300-2700	300	2700	70	250	3039	30.4
C21-300-2800	300	2800	70	250	3151	31.5
C21-300-2900	300	2900	70	250	3264	32.6
C21-300-3000	300	3000	70	250	2121	21.2
C21-400-400	400	400	70	350	564	5.6
C21-400-500	400	500	70	350	705	7.1
C21-400-600	400	600	70	350	846	8.5
C21-400-700	400	700	70	350	987	9.9
C21-400-800	400	800	70	350	1128	11.3
C21-400-900	400	900	70	350	1269	12.7
C21-400-1000	400	1000	70	350	1410	14.1
C21-400-1100	400	1100	70	350	1551	15.5
C21-400-1200	400	1200	70	350	1692	16.9
C21-400-1300	400	1300	70	350	1833	18.3
C21-400-1400	400	1400	70	350	1974	19.7
C21-400-1500	400	1500	70	350	2115	21.2
C21-400-1600	400	1600	70	350	2256	22.6
C21-400-1700	400	1700	70	350	2397	24.0
C21-400-1800	400	1800	70	350	2538	25.4
C21-400-1900	400	1900	70	350	2679	26.8
C21-400-2000	400	2000	70	350	2820	28.2

Code	Height	Width	Depth	Center To Center	Power	Heating Area
型号	高度 (mm)	宽度 (mm)	深度 (mm)	中心到中心 (mm)	功率 (w)	供暖面积 (m ²)
C21-400-2100	400	2100	70	350	2961	29.6
C21-400-2200	400	2200	70	350	3102	31.0
C21-400-2300	400	2300	70	350	3243	32.4
C21-400-2400	400	2400	70	350	3384	33.8
C21-400-2500	400	2500	70	350	3525	35.3
C21-400-2600	400	2600	70	350	3666	36.7
C21-400-2700	400	2700	70	350	3807	38.1
C21-400-2800	400	2800	70	350	3948	39.5
C21-400-2900	400	2900	70	350	4089	40.9
C21-400-3000	400	3000	70	350	4230	42.3
C21-500-400	500	400	70	450	711	7.1
C21-500-500	500	500	70	450	889	8.9
C21-500-600	500	600	70	450	1067	10.7
C21-500-700	500	700	70	450	1246	12.5
C21-500-800	500	800	70	450	1424	14.2
C21-500-900	500	900	70	450	1602	16.0
C21-500-1000	500	1000	70	450	1780	17.8
C21-500-1100	500	1100	70	450	1958	19.6
C21-500-1200	500	1200	70	450	2136	21.4
C21-500-1300	500	1300	70	450	2314	23.1
C21-500-1400	500	1400	70	450	2492	24.9
C21-500-1500	500	1500	70	450	2670	26.7
C21-500-1600	500	1600	70	450	2848	28.5
C21-500-1700	500	1700	70	450	3026	30.3
C21-500-1800	500	1800	70	450	3204	32.0
C21-500-1900	500	1900	70	450	3382	33.8
C21-500-2000	500	2000	70	450	3560	35.6
C21-500-2100	500	2100	70	450	3738	37.4
C21-500-2200	500	2200	70	450	3916	39.2
C21-500-2300	500	2300	70	450	4094	40.9
C21-500-2400	500	2400	70	450	4272	42.7
C21-500-2500	500	2500	70	450	4450	44.5
C21-500-2600	500	2600	70	450	4628	46.3
C21-500-2700	500	2700	70	450	4806	48.1
C21-500-2800	500	2800	70	450	4984	49.8
C21-500-2900	500	2900	70	450	5162	51.6
C21-500-3000	500	3000	70	450	5340	53.4
C21-600-400	600	400	70	550	827	8.3
C21-600-500	600	500	70	550	1033	10.3
C21-600-600	600	600	70	550	1242	12.4
C21-600-700	600	700	70	550	1449	14.5
C21-600-800	600	800	70	550	1656	16.6
C21-600-900	600	900	70	550	1863	18.6
C21-600-1000	600	1000	70	550	2070	20.7

C21-600-1100	600	1100	70	550	2277	22.8
C21-600-1200	600	1200	70	550	2484	24.8
C21-600-1300	600	1300	70	550	2691	26.9
C21-600-1400	600	1400	70	550	2898	29.0
C21-600-1500	600	1500	70	550	3105	31.1
C21-600-1600	600	1600	70	550	3312	33.1
C21-600-1700	600	1700	70	550	3519	35.2
C21-600-1800	600	1800	70	550	3726	37.3
C21-600-1900	600	1900	70	550	3933	39.3
C21-600-2000	600	2000	70	550	4140	41.4
C21-600-2100	600	2100	70	550	4347	43.5
C21-600-2200	600	2200	70	550	4554	45.5
C21-600-2300	600	2300	70	550	4761	47.6
C21-600-2400	600	2400	70	550	4968	49.7
C21-600-2500	600	2500	70	550	5175	51.8
C21-600-2600	600	2600	70	550	5382	53.8
C21-600-2700	600	2700	70	550	5589	55.9
C21-600-2800	600	2800	70	550	5796	58.0
C21-600-2900	600	2900	70	550	6003	60.0
C21-600-3000	600	3000	70	550	6210	62.1
C21-900-400	900	400	70	850	1082	10.8
C21-900-500	900	500	70	850	1353	13.5
C21-900-600	900	600	70	850	1623	16.2
C21-900-700	900	700	70	850	1894	18.9
C21-900-800	900	800	70	850	2164	21.6
C21-900-900	900	900	70	850	2435	24.4
C21-900-1000	900	1000	70	850	2705	27.1
C21-900-1100	900	1100	70	850	2976	29.8
C21-900-1200	900	1200	70	850	3246	32.5
C21-900-1300	900	1300	70	850	3517	35.2
C21-900-1400	900	1400	70	850	3787	37.9
C21-900-1500	900	1500	70	850	4058	40.6
C21-900-1600	900	1600	70	850	4328	43.3
C21-900-1700	900	1700	70	850	4599	46.0
C21-900-1800	900	1800	70	850	4869	48.7
C21-900-1900	900	1900	70	850	5140	51.4
C21-900-2000	900	2000	70	850	5410	54.1
C21-900-2100	900	2100	70	850	5681	56.8
C21-900-2200	900	2200	70	850	5951	59.5
C21-900-2300	900	2300	70	850	6222	62.2
C21-900-2400	900	2400	70	850	6492	64.9
C21-900-2500	900	2500	70	850	6763	67.6
C21-900-2600	900	2600	70	850	7033	70.3
C21-900-2700	900	2700	70	850	7304	73.0
C21-900-2800	900	2800	70	850	7574	75.7
C21-900-2900	900	2900	70	850	7845	78.5
C21-900-3000	900	3000	70	850	8115	81.2



Common Colors


常用颜色



cool white off white ivory

Finish

表面效果



glossy
亮光

* Product color accept customization 产品颜色接受定制

JD-22K

试验压力
Test pressure

13Bar

Code	Height	Width	Depth	Center To Center	Power	Heating Area
型号	高度 (mm)	宽度 (mm)	深度 (mm)	中心到中心 (mm)	功率 (w)	供暖面积 (m ²)
C22-300-400	300	400	100	250	577	5.8
C22-300-500	300	500	100	250	721	7.2
C22-300-600	300	600	100	250	866	8.7
C22-300-700	300	700	100	250	1010	10.1
C22-300-800	300	800	100	250	1154	11.5
C22-300-900	300	900	100	250	1299	13
C22-300-1000	300	1000	100	250	1443	14.4
C22-300-1100	300	1100	100	250	1587	15.9
C22-300-1200	300	1200	100	250	1731	17.3
C22-300-1300	300	1300	100	250	1876	18.8
C22-300-1400	300	1400	100	250	2020	20.2
C22-300-1500	300	1500	100	250	2164	21.6
C22-300-1600	300	1600	100	250	2309	23.1
C22-300-1700	300	1700	100	250	2453	24.5
C22-300-1800	300	1800	100	250	2597	26
C22-300-1900	300	1900	100	250	2741	27.4
C22-300-2000	300	2000	100	250	2886	28.9
C22-300-2100	300	2100	100	250	3030	30.3
C22-300-2200	300	2200	100	250	3174	31.7
C22-300-2300	300	2300	100	250	3319	33.2
C22-300-2400	300	2400	100	250	3463	34.6
C22-300-2500	300	2500	100	250	3607	36.1
C22-300-2600	300	2600	100	250	3751	37.5
C22-300-2700	300	2700	100	250	3896	39
C22-300-2800	300	2800	100	250	4040	40.4
C22-300-2900	300	2900	100	250	4184	41.8
C22-300-3000	300	3000	100	250	4329	43.3
C22-400-400	400	400	100	350	728	7.3
C22-400-500	400	500	100	350	910	9.1
C22-400-600	400	600	100	350	1092	10.9
C22-400-700	400	700	100	350	1274	12.7
C22-400-800	400	800	100	350	1456	14.6
C22-400-900	400	900	100	350	1638	16.4
C22-400-1000	400	1000	100	350	1820	18.2
C22-400-1100	400	1100	100	350	2002	20
C22-400-1200	400	1200	100	350	2184	21.8
C22-400-1300	400	1300	100	350	2366	23.7
C22-400-1400	400	1400	100	350	2548	25.5
C22-400-1500	400	1500	100	350	2730	27.3
C22-400-1600	400	1600	100	350	2912	29.1
C22-400-1700	400	1700	100	350	3094	30.9
C22-400-1800	400	1800	100	350	3276	32.8
C22-400-1900	400	1900	100	350	3458	34.6
C22-400-2000	400	2000	100	350	3640	36.4

Code	Height	Width	Depth	Center To Center	Power	Heating Area
型号	高度 (mm)	宽度 (mm)	深度 (mm)	中心到中心 (mm)	功率 (w)	供暖面积 (m ²)
C22-400-2100	400	2100	100	350	3822	38.2
C22-400-2200	400	2200	100	350	4004	40
C22-400-2300	400	2300	100	350	4186	41.9
C22-400-2400	400	2400	100	350	4368	43.7
C22-400-2500	400	2500	100	350	4550	45.5
C22-400-2600	400	2600	100	350	4732	47.3
C22-400-2700	400	2700	100	350	4914	49.1
C22-400-2800	400	2800	100	350	5096	51
C22-400-2900	400	2900	100	350	5278	52.8
C22-400-3000	400	3000	100	350	5460	54.6
C22-500-400	500	400	100	450	912	9.12
C22-500-500	500	500	100	450	1140	11.4
C22-500-600	500	600	100	450	1368	13.68
C22-500-700	500	700	100	450	1596	15.96
C22-500-800	500	800	100	450	1824	18.24
C22-500-900	500	900	100	450	2052	20.52
C22-500-1000	500	1000	100	450	2280	22.8
C22-500-1100	500	1100	100	450	2508	25.08
C22-500-1200	500	1200	100	450	2736	27.36
C22-500-1300	500	1300	100	450	2964	29.64
C22-500-1400	500	1400	100	450	3192	31.92
C22-500-1500	500	1500	100	450	3420	34.2
C22-500-1600	500	1600	100	450	3648	36.48
C22-500-1700	500	1700	100	450	3876	38.76
C22-500-1800	500	1800	100	450	4104	41.04
C22-500-1900	500	1900	100	450	4332	43.32
C22-500-2000	500	2000	100	450	4560	45.6
C22-500-2100	500	2100	100	450	4788	47.88
C22-500-2200	500	2200	100	450	5016	50.16
C22-500-2300	500	2300	100	450	5244	52.44
C22-500-2400	500	2400	100	450	5472	54.72
C22-500-2500	500	2500	100	450	5700	57
C22-500-2600	500	2600	100	450	5928	59.28
C22-500-2700	500	2700	100	450	6156	61.56
C22-500-2800	500	2800	100	450	6384	63.84
C22-500-2900	500	2900	100	450	6612	66.12
C22-500-3000	500	3000	100	450	6840	68.4
C22-600-400	600	400	100	550	1060	10.6
C22-600-500	600	500	100	550	1325	13.25
C22-600-600	600	600	100	550	1590	15.9
C22-600-700	600	700	100	550	1855	18.55
C22-600-800	600	800	100	550	2120	21.2
C22-600-900	600	900	100	550	2385	23.85
C22-600-1000	600	1000	100	550	2650	26.5

C22-600-1100	600	1100	100	550	2915	29.15
C22-600-1200	600	1200	100	550	3180	31.8
C22-600-1300	600	1300	100	550	3445	34.45
C22-600-1400	600	1400	100	550	3710	37.1
C22-600-1500	600	1500	100	550	3975	39.75
C22-600-1600	600	1600	100	550	4240	42.4
C22-600-1700	600	1700	100	550	4505	45.05
C22-600-1800	600	1800	100	550	4770	47.7
C22-600-1900	600	1900	100	550	5035	50.35
C22-600-2000	600	2000	100	550	5300	53
C22-600-2100	600	2100	100	550	5565	55.65
C22-600-2200	600	2200	100	550	5830	58.3
C22-600-2300	600	2300	100	550	6095	60.95
C22-600-2400	600	2400	100	550	6360	63.6
C22-600-2500	600	2500	100	550	6625	66.25
C22-600-2600	600	2600	100	550	6890	68.9
C22-600-2700	600	2700	100	550	7155	71.55
C22-600-2800	600	2800	100	550	7420	74.2
C22-600-2900	600	2900	100	550	7685	76.85
C22-600-3000	600	3000	100	550	7950	79.5
C22-900-400	900	400	100	850	1397	14
C22-900-500	900	500	100	850	1746	17.5
C22-900-600	900	600	100	850	2095	21
C22-900-700	900	700	100	850	2444	24.4
C22-900-800	900	800	100	850	2794	27.9
C22-900-900	900	900	100	850	3143	31.4
C22-900-1000	900	1000	100	850	3492	34.9
C22-900-1100	900	1100	100	850	3841	38.4
C22-900-1200	900	1200	100	850	4190	41.9
C22-900-1300	900	1300	100	850	4540	45.4
C22-900-1400	900	1400	100	850	4889	48.9
C22-900-1500	900	1500	100	850	5238	52.4
C22-900-1600	900	1600	100	850	5587	55.9
C22-900-1700	900	1700	100	850	5936	59.4
C22-900-1800	900	1800	100	850	6286	62.9
C22-900-1900	900	1900	100	850	6635	66.4
C22-900-2000	900	2000	100	850	6984	69.8
C22-900-2100	900	2100	100	850	7333	73.3
C22-900-2200	900	2200	100	850	7682	76.8
C22-900-2300	900	2300	100	850	8032	80.3
C22-900-2400	900	2400	100	850	8381	83.8
C22-900-2500	900	2500	100	850	8730	87.3
C22-900-2600	900	2600	100	850	9079	90.8
C22-900-2700	900	2700	100	850	9429	94.3
C22-900-2800	900	2800	100	850	9778	97.8
C22-900-2900	900	2900	100	850	10127	101.3
C22-900-3000	900	3000	100	850	10476	104.8



Common Colors


常用颜色



cool white off white ivory

Finish

表面效果



glossy
亮光

* Product color accept customization 产品颜色接受定制

JD-33K

试验压力
Test pressure

13Bar

Code	Height	Width	Depth	Center To Center	Power	Heating Area
型号	高度 (mm)	宽度 (mm)	深度 (mm)	中心到中心 (mm)	功率 (w)	供暖面积 (m ²)
C33-300-400	300	400	150	250	808	8.1
C33-300-500	300	500	150	250	1010	10.1
C33-300-600	300	600	150	250	1212	12.1
C33-300-700	300	700	150	250	1414	14.1
C33-300-800	300	800	150	250	1616	16.2
C33-300-900	300	900	150	250	1818	18.2
C33-300-1000	300	1000	150	250	2020	20.2
C33-300-1100	300	1100	150	250	2222	22.2
C33-300-1200	300	1200	150	250	2424	24.2
C33-300-1300	300	1300	150	250	2626	26.3
C33-300-1400	300	1400	150	250	2828	28.3
C33-300-1500	300	1500	150	250	3030	30.3
C33-300-1600	300	1600	150	250	3232	32.3
C33-300-1700	300	1700	150	250	3434	34.3
C33-300-1800	300	1800	150	250	3636	36.4
C33-300-1900	300	1900	150	250	3838	38.4
C33-300-2000	300	2000	150	250	4040	40.4
C33-300-2100	300	2100	150	250	4242	42.4
C33-300-2200	300	2200	150	250	4444	44.4
C33-300-2300	300	2300	150	250	4646	46.5
C33-300-2400	300	2400	150	250	4848	48.5
C33-300-2500	300	2500	150	250	5050	50.5
C33-300-2600	300	2600	150	250	5252	52.5
C33-300-2700	300	2700	150	250	5454	54.5
C33-300-2800	300	2800	150	250	5656	56.6
C33-300-2900	300	2900	150	250	5858	58.6
C33-300-3000	300	3000	150	250	6060	60.6
C33-400-400	400	400	150	350	1038	10.4
C33-400-500	400	500	150	350	1298	13
C33-400-600	400	600	150	350	1558	15.6
C33-400-700	400	700	150	350	1817	18.2
C33-400-800	400	800	150	350	2077	20.8
C33-400-900	400	900	150	350	2336	23.4
C33-400-1000	400	1000	150	350	2596	26
C33-400-1100	400	1100	150	350	2855	28.6
C33-400-1200	400	1200	150	350	3115	31.2
C33-400-1300	400	1300	150	350	3375	33.8
C33-400-1400	400	1400	150	350	3634	36.3
C33-400-1500	400	1500	150	350	3894	38.9
C33-400-1600	400	1600	150	350	4153	41.5
C33-400-1700	400	1700	150	350	4413	44.1
C33-400-1800	400	1800	150	350	4673	46.7
C33-400-1900	400	1900	150	350	4932	49.3
C33-400-2000	400	2000	150	350	5192	51.9

Code	Height	Width	Depth	Center To Center	Power	Heating Area
型号	高度 (mm)	宽度 (mm)	深度 (mm)	中心到中心 (mm)	功率 (w)	供暖面积 (m ²)
C33-400-2100	400	2100	150	350	5452	54.5
C33-400-2200	400	2200	150	350	5711	57.1
C33-400-2300	400	2300	150	350	5971	59.7
C33-400-2400	400	2400	150	350	6230	62.3
C33-400-2500	400	2500	150	350	6490	64.9
C33-400-2600	400	2600	150	350	6749	67.5
C33-400-2700	400	2700	150	350	7009	70.1
C33-400-2800	400	2800	150	350	7268	72.7
C33-400-2900	400	2900	150	350	7528	75.3
C33-400-3000	400	3000	150	350	7788	77.9
C33-500-400	500	400	150	450	1277	12.77
C33-500-500	500	500	150	450	1596	15.96
C33-500-600	500	600	150	450	1914	19.14
C33-500-700	500	700	150	450	2233	22.33
C33-500-800	500	800	150	450	2552	25.52
C33-500-900	500	900	150	450	2871	28.71
C33-500-1000	500	1000	150	450	3190	31.9
C33-500-1100	500	1100	150	450	3509	35.09
C33-500-1200	500	1200	150	450	3828	38.28
C33-500-1300	500	1300	150	450	4147	41.47
C33-500-1400	500	1400	150	450	4466	44.66
C33-500-1500	500	1500	150	450	4785	47.85
C33-500-1600	500	1600	150	450	5104	51.04
C33-500-1700	500	1700	150	450	5423	54.23
C33-500-1800	500	1800	150	450	5742	57.42
C33-500-1900	500	1900	150	450	6061	60.61
C33-500-2000	500	2000	150	450	6380	63.8
C33-500-2100	500	2100	150	450	6699	66.99
C33-500-2200	500	2200	150	450	7018	70.18
C33-500-2300	500	2300	150	450	7337	73.37
C33-500-2400	500	2400	150	450	7656	76.56
C33-500-2500	500	2500	150	450	7975	79.75
C33-500-2600	500	2600	150	450	8294	82.94
C33-500-2700	500	2700	150	450	8613	86.13
C33-500-2800	500	2800	150	450	8932	89.32
C33-500-2900	500	2900	150	450	9251	92.51
C33-500-3000	500	3000	150	450	9570	95.7
C33-600-400	600	400	150	550	1484	14.84
C33-600-500	600	500	150	550	1855	18.55
C33-600-600	600	600	150	550	2226	22.26
C33-600-700	600	700	150	550	2597	25.97
C33-600-800	600	800	150	550	2968	29.68
C33-600-900	600	900	150	550	3339	33.39
C33-600-1000	600	1000	150	550	3710	37.1

The output above is for reference only, and the exact data should be based on the test.

C33-600-1100	600	1100	150	550	4081	40.81
C33-600-1200	600	1200	150	550	4452	44.52
C33-600-1300	600	1300	150	550	4823	48.23
C33-600-1400	600	1400	150	550	5194	51.94
C33-600-1500	600	1500	150	550	5565	55.65
C33-600-1600	600	1600	150	550	5936	59.36
C33-600-1700	600	1700	150	550	6307	63.07
C33-600-1800	600	1800	150	550	6678	66.78
C33-600-1900	600	1900	150	550	7049	70.49
C33-600-2000	600	2000	150	550	7420	74.2
C33-600-2100	600	2100	150	550	7791	77.91
C33-600-2200	600	2200	150	550	8162	81.62
C33-600-2300	600	2300	150	550	8533	85.33
C33-600-2400	600	2400	150	550	8904	89.04
C33-600-2500	600	2500	150	550	9275	92.75
C33-600-2600	600	2600	150	550	9646	96.46
C33-600-2700	600	2700	150	550	10017	100.17
C33-600-2800	600	2800	150	550	10388	103.88
C33-600-2900	600	2900	150	550	10759	107.59
C33-600-3000	600	3000	150	550	11130	111.3
C33-900-400	900	400	150	850	1924	19.2
C33-900-500	900	500	150	850	2406	24.1
C33-900-600	900	600	150	850	2887	28.9
C33-900-700	900	700	150	850	3368	33.7
C33-900-800	900	800	150	850	3849	38.5
C33-900-900	900	900	150	850	4330	43.3
C33-900-1000	900	1000	150	850	4811	48.1
C33-900-1100	900	1100	150	850	5292	52.9
C33-900-1200	900	1200	150	850	5773	57.7
C33-900-1300	900	1300	150	850	6254	62.5
C33-900-1400	900	1400	150	850	6735	67.4
C33-900-1500	900	1500	150	850	7217	72.2
C33-900-1600	900	1600	150	850	7698	77
C33-900-1700	900	1700	150	850	8179	81.8
C33-900-1800	900	1800	150	850	8660	86.6
C33-900-1900	900	1900	150	850	9141	91.4
C33-900-2000	900	2000	150	850	9622	96.2
C33-900-2100	900	2100	150	850	10103	101
C33-900-2200	900	2200	150	850	10584	105.8
C33-900-2300	900	2300	150	850	11065	110.7
C33-900-2400	900	2400	150	850	11546	115.5
C33-900-2500	900	2500	150	850	12028	120.3
C33-900-2600	900	2600	150	850	12509	125.1
C33-900-2700	900	2700	150	850	12990	129.9
C33-900-2800	900	2800	150	850	13471	134.7
C33-900-2900	900	2900	150	850	13952	139.5
C33-900-3000	900	3000	150	850	14433	144.3

The output above is for reference only, and the exact data should be based on the test.