



九鼎散热器
JIUDING RADIATOR

JIUDING RAD- IATOR

九 鼎
钢制板式散热器

九鼎

TIANJIN JIUDING YANGGUANG HVAC CO., LTD



扫码关注九鼎官方网站




022-69189950



No. 9, Wuwei Road, Ninghe Economic Development Zone, Tianjin



1185279645@qq.com

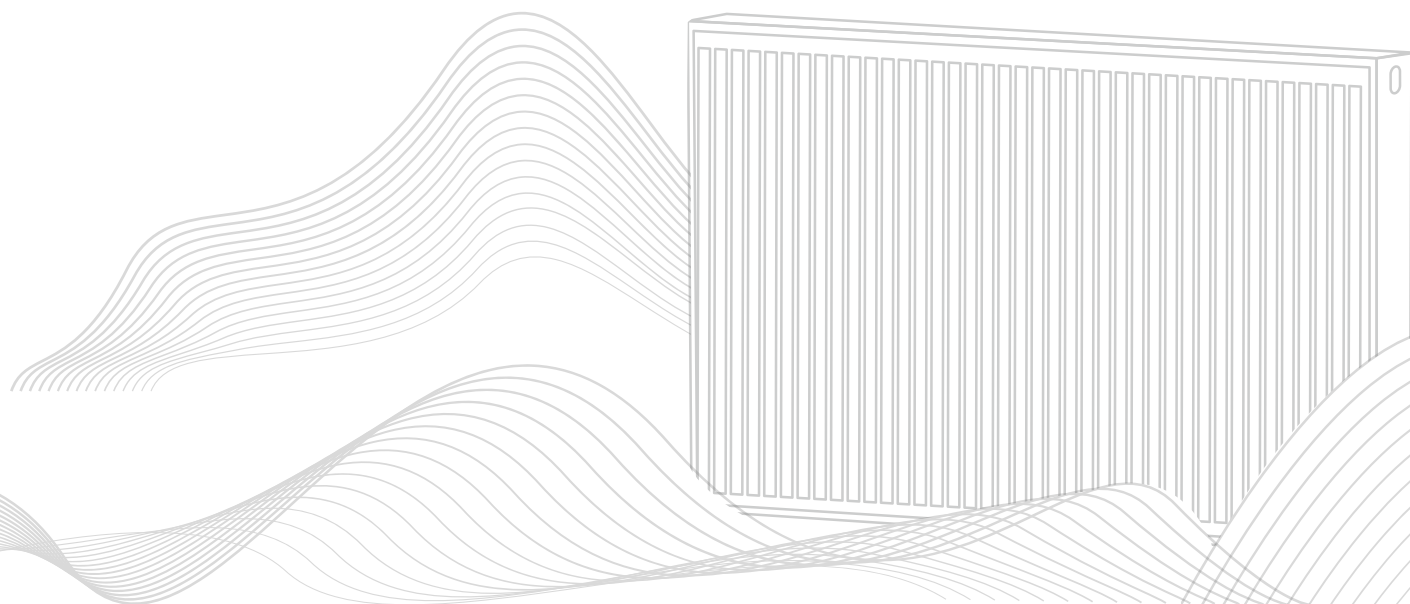

CONTENTS

铸 九 鼎 名 牌
送 万 家 温 暖

CONTENTS

01.COMPANY INTRODUCE	P01
02.SALES MARKETS	P05
03.PRODUCT ADVANTAGES	P07
04.EQUIPMENT TECHNOLOGY	P09
05.CUSTOMIZATION CAPABILITY	P11
05.Product Model	P13

COMPANY INTRODUCE

公司介绍



1998

NOW

JIUDING Radiator is a professional brand specializing in the R&D, manufacturing, and export of steel radiators, with a strong presence in international heating markets and a stable global supply system. The brand holds complete export qualifications, and its products comply with EN442 and other international standards, serving customers across Europe, Russia, Central Asia, and the Middle East.

In overseas markets, JIUDING Radiator maintains long-term cooperation with large local building material retail chains, leading regional distributors, and well-known heating brands, supplying both retail networks and project-based applications with strict requirements for quality and compliance.

For quality assurance, all JIUDING Radiator products undergo strict testing procedures. Each radiator is pressure tested at 13 kg (13 bar), reaching international top-level performance standards, ensuring safety and reliability under long-term operating conditions. Production is supported by automated punching and welding lines, combined with acid pickling, phosphating, and electrostatic powder coating, providing excellent corrosion resistance and extended service life.

With consistent quality control, dependable delivery capability, and professional export services, JIUDING Radiator continues to support major international customers and brand partners worldwide.

2002

One of the founding organizations of the Beijing "Radiator Declaration."

2006

Joined the China Construction Metal Structure Association.

Awarded the "AAA-level Enterprise for Quality Service and Reputation."

In the annual market survey, based on the results of third-party customer satisfaction assessments, the company was awarded the title of "National Advanced Unit for High Quality and Trustworthiness."



2009

Awarded the "March 15th" China Quality Inspection Campaign's seal of approval for market-tested products, and is the only product recommended by the Quality Inspection Campaign.



2014

Certified by the EU CE mark, it sells well in Europe.



2018

We have established a strategic partnership with Poly Group.



2020

We participated in the construction project of Beijing Daxing Airport and became the designated supplier of radiators.

2005

Awarded the title of "China's Famous Brand."

2008



Having passed market quality inspections conducted by the General Administration of Quality Supervision, Inspection and Quarantine, it was selected for use in the venues for the Olympic car and motorcycle races.

2011

It was designated by the Chinese Ministry of Construction as a designated production base for radiators, and in the same year, it was awarded one of the top ten radiator brands in China.

2017

Products used in the office building and library of the Central Party School of the Communist Party of China.



2019

Participated in the activities celebrating the 70th anniversary of the founding of the People's Republic of China, and was the designated radiator brand for the renovation projects of Tiananmen Square and the Forbidden City.

2021

Became the designated supplier of radiators for the Beijing Winter Olympics.




ISO14001 环境管理体系认证证书




ISO9001 环境质量认证体系




ISO45001 职业健康安全管理体系认证证书

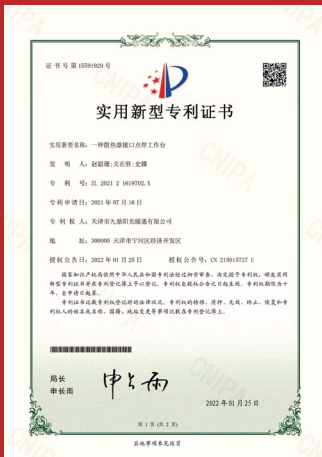

一种散热器接口点焊工作台

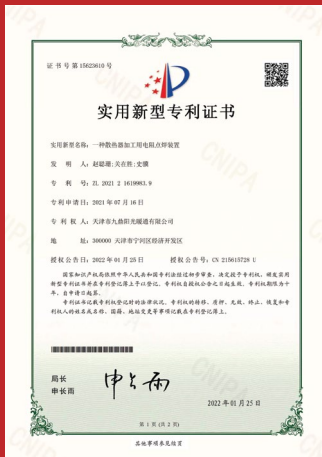

一种散热器加工用电阻点焊装置

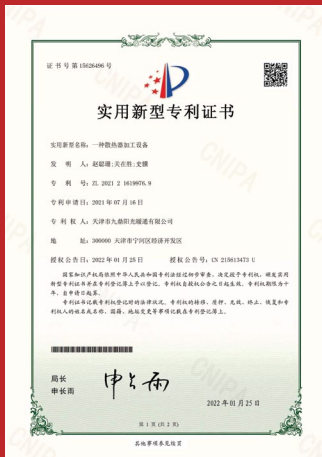

一种散热器加工设备

SALES MARKETS

销售国家与市场覆盖

JIUDING Radiator products are exported to a wide range of international markets. The main sales regions include:

The European Union and core European countries (Germany, France, Belgium, Poland, the United Kingdom), Eastern Europe and CIS countries (Russia, Belarus, Armenia, Georgia, Kazakhstan, Uzbekistan, Kyrgyzstan, Turkmenistan, Tajikistan), Mongolia, as well as the Middle East, North Africa, and South America (Turkey, Libya, Algeria, Argentina).

This diversified market presence demonstrates JIUDING Radiator's strong adaptability to different climates, technical standards, and regulatory requirements worldwide.




PRODUCT ADVANTAGES

产品优势


01 13kg (13bar) Pressure Testing

All radiators are tested at 13kg (13bar), reaching international top-level safety standards and ensuring reliable long-term operation.

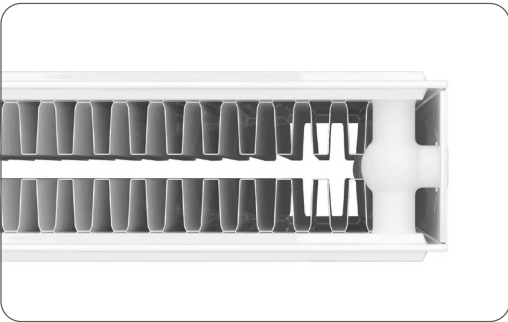

02 Inverted U-Shaped Convector Fins

The inverted U-shaped fin design increases the contact area with the heat source, significantly enhancing radiation, convection, and conduction heat transfer performance.


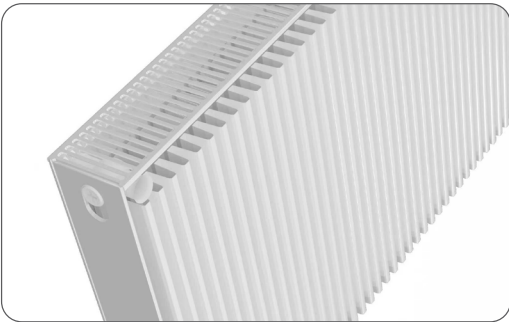


03 Raised Internal Convector Fins

The increased height of internal fins improves airflow circulation and boosts heat dissipation efficiency, delivering faster and more uniform heating output.

04 Water-Drop Shaped Top Grille

The water-drop shaped top grille allows hot air to rise and diffuse smoothly without airflow obstruction, while reducing dust accumulation and preventing wall discoloration caused by heat circulation.

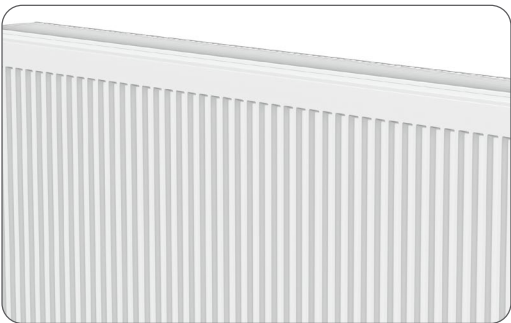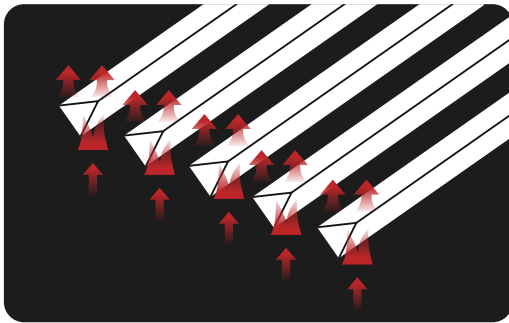

05 Advanced Anti-Corrosion Process

A full acid pickling, phosphating, and electrostatic powder coating process ensures excellent coating adhesion, corrosion resistance, and extended service life.

06 In-House R&D And Customization

Supported by internal engineering teams, JIUDING Radiator provides flexible customization in size, structure, connections, and appearance to meet diverse market requirements.



07 Proven Export Market Performance

Products are widely supplied to major retail chains, key distributors, and established heating brands in international markets.

EQUIPMENT TECHNOLOGY

设备工艺

JIUDING Radiator has continuously invested in its manufacturing system, building a complete production capability based on advanced equipment, high-quality raw materials, and standardized processes.

01

Production Equipment


In terms of equipment, JIUDING Radiator is equipped with automated punching lines, high-precision welding machines, and forming equipment. Key production steps are controlled through automation and standardized procedures, ensuring consistent dimensional accuracy and strong, uniform welds that support reliable product performance.



02

Selection Of Raw Materials

Regarding raw materials, only high-quality cold-rolled low-carbon steel is selected, offering excellent ductility, weldability, and pressure resistance. This guarantees structural strength and stable long-term operation of the radiators.

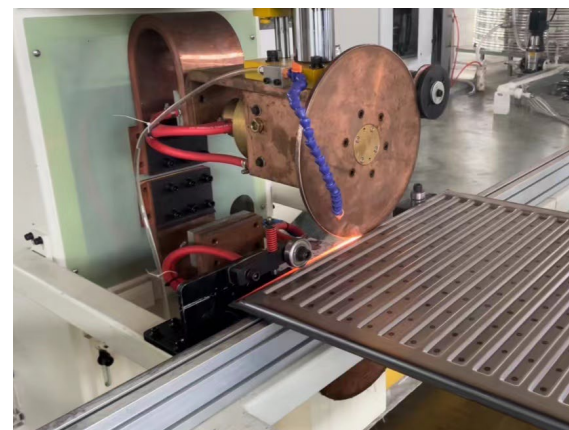

03

Manufacturing Process

or manufacturing processes, JIUDING Radiator follows a strict and standardized production flow, including stamping, welding assembly, acid pickling and phosphating surface pretreatment, and electrostatic powder coating. The pickling and phosphating process effectively removes surface impurities and significantly improves coating adhesion, providing superior corrosion resistance and extended service life. All finished products are subject to comprehensive inspections and 13 kg (13 bar) pressure testing before delivery, meeting the high requirements of international markets.



04

Systematic Management

Through systematic control of equipment, materials, and processes, JIUDING Radiator consistently delivers reliable, high-quality heating products worldwide.



CUSTOMIZATION CAPABILITY

定制化能力

JIUDING Radiator offers a mature and flexible customization capability to meet different market standards, installation conditions, and application scenarios.



Bottom entry three-way connector - Accessories

01

Customizable Bottom Connection

Products can be manufactured in standard versions or with bottom connections, supporting 6-port or 8-port configurations to suit various piping layouts.

02

Supports Different Installation Methods

For installation options, customers may choose standard wall-mounted, double-sided wall-mounted, or floor-standing (with brackets) solutions, allowing easy adaptation to residential, commercial, and project applications.



Single-sided hanging



Double-sided hanging




ground support frame

03

Both Height And Length Can Be Customized On Demand

enabling precise matching with room size, heating load, and regional installation practices. Through multi-dimensional customization in structure, connection, and size, JIUDING Radiator effectively serves diverse customer requirements across different markets.

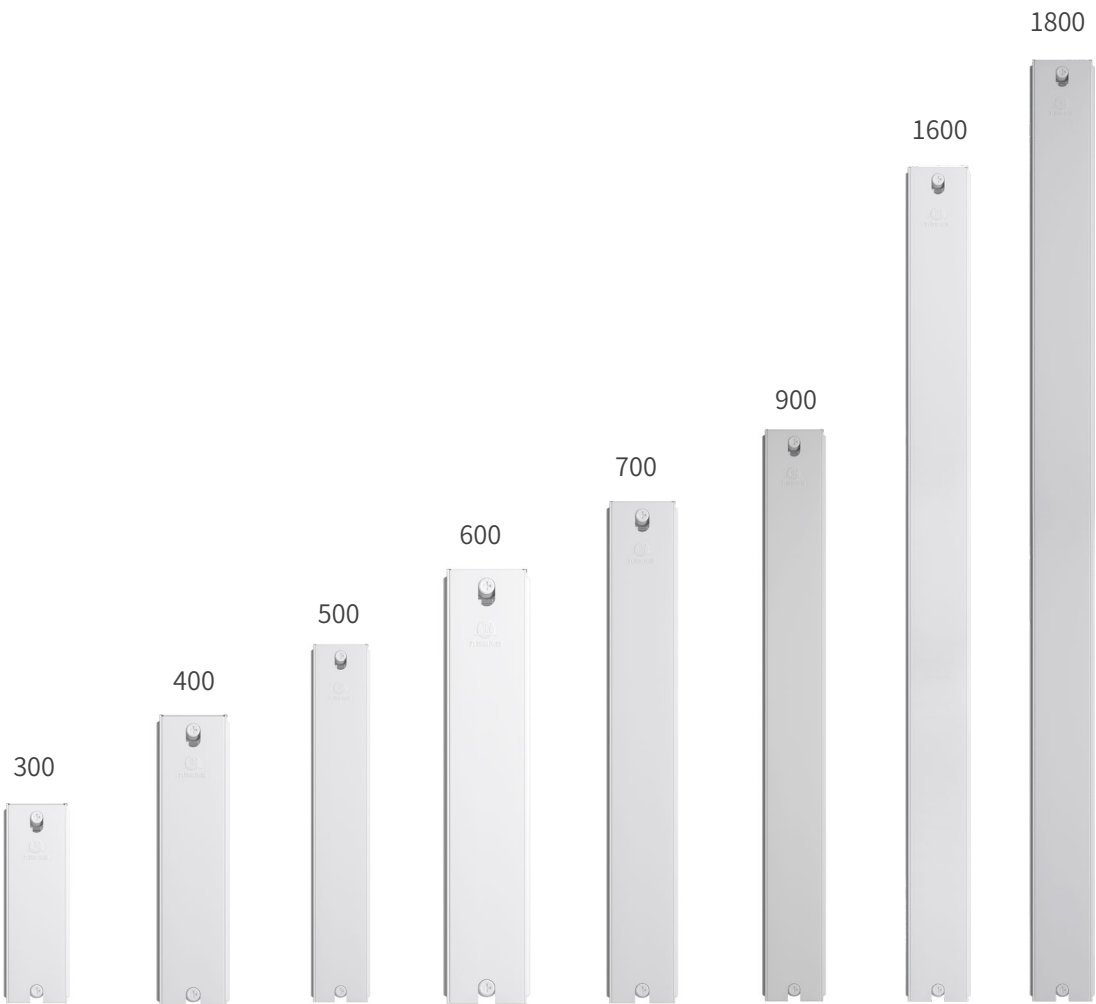




Common Colors
常用颜色



*Product color accept customization 产品颜色接受定制

Finish
表面效果



JD-11K

试验压力 Test pressure
13Bar

Code	Height	Width	Depth	Center To Center	Power	Heating Area
型号	高度 (mm)	宽度 (mm)	深度 (mm)	中心到中心 (mm)	功率 (w)	供暖面积 (m²)
C11-300-500	300	500	60	250	388	3.9
C11-300-600	300	600	60	250	466	4.7
C11-300-700	300	700	60	250	544	5.4
C11-300-800	300	800	60	250	622	6.2
C11-300-900	300	900	60	250	699	7
C11-300-1000	300	1000	60	250	777	7.8
C11-300-1100	300	1100	60	250	855	8.6
C11-300-1200	300	1200	60	250	932	9.3
C11-300-1300	300	1300	60	250	1010	10.1
C11-300-1400	300	1400	60	250	1088	10.9
C11-300-1500	300	1500	60	250	1165	11.7
C11-300-1600	300	1600	60	250	1243	12.4
C11-300-1700	300	1700	60	250	1321	13.2
C11-300-1800	300	1800	60	250	1398	14
C11-300-1900	300	1900	60	250	1476	14.8
C11-300-2000	300	2000	60	250	1554	15.5
C11-300-2100	300	2100	60	250	1632	16.3
C11-300-2200	300	2200	60	250	1709	17.1
C11-300-2300	300	2300	60	250	1787	17.9
C11-300-2400	300	2400	60	250	1865	18.7
C11-300-2500	300	2500	60	250	1942	19.4
C11-300-2600	300	2600	60	250	2020	20.2
C11-300-2700	300	2700	60	250	2098	21
C11-300-2800	300	2800	60	250	2175	21.8
C11-300-2900	300	2900	60	250	2253	22.5
C11-300-3000	300	3000	60	250	2331	23.3
C11-400-400	400	400	60	350	398	4
C11-400-500	400	500	60	350	498	5
C11-400-600	400	600	60	350	597	6
C11-400-700	400	700	60	350	697	7
C11-400-800	400	800	60	350	797	8
C11-400-900	400	900	60	350	896	9
C11-400-1000	400	1000	60	350	996	10
C11-400-1100	400	1100	60	350	1095	11
C11-400-1200	400	1200	60	350	1195	12
C11-400-1300	400	1300	60	350	1294	12.9
C11-400-1400	400	1400	60	350	1394	13.9
C11-400-1500	400	1500	60	350	1493	14.9
C11-400-1600	400	1600	60	350	1593	15.9
C11-400-1700	400	1700	60	350	1693	16.9
C11-400-1800	400	1800	60	350	1792	17.9
C11-400-1900	400	1900	60	350	1892	18.9
C11-400-2000	400	2000	60	350	1991	19.9
C11-400-2100	400	2100	60	350	2091	20.9

Code	Height	Width	Depth	Center To Center	Power	Heating Area
型号	高度 (mm)	宽度 (mm)	深度 (mm)	中心到中心 (mm)	功率 (w)	供暖面积 (m²)
C11-400-2200	400	2200	60	350	2190	21.9
C11-400-2300	400	2300	60	350	2290	22.9
C11-400-2400	400	2400	60	350	2390	23.9
C11-400-2500	400	2500	60	350	2490	24.9
C11-400-2600	400	2600	60	350	2589	25.9
C11-400-2700	400	2700	60	350	2689	26.9
C11-400-2800	400	2800	60	350	2788	27.9
C11-400-2900	400	2900	60	350	2888	28.9
C11-400-3000	400	3000	60	350	2987	29.9
C11-500-400	500	400	60	450	480	4.8
C11-500-500	500	500	60	450	600	6
C11-500-600	500	600	60	450	720	7.2
C11-500-700	500	700	60	450	840	8.4
C11-500-800	500	800	60	450	960	9.6
C11-500-900	500	900	60	450	1080	10.8
C11-500-1000	500	1000	60	450	1200	12
C11-500-1100	500	1100	60	450	1320	13.2
C11-500-1200	500	1200	60	450	1440	14.4
C11-500-1300	500	1300	60	450	1560	15.6
C11-500-1400	500	1400	60	450	1680	16.8
C11-500-1500	500	1500	60	450	1800	18
C11-500-1600	500	1600	60	450	1920	19.2
C11-500-1700	500	1700	60	450	2040	20.4
C11-500-1800	500	1800	60	450	2160	21.6
C11-500-1900	500	1900	60	450	2280	22.8
C11-500-2000	500	2000	60	450	2400	24
C11-500-2100	500	2100	60	450	2520	25.2
C11-500-2200	500	2200	60	450	2640	26.4
C11-500-2300	500	2300	60	450	2760	27.6
C11-500-2400	500	2400	60	450	2880	28.8
C11-500-2500	500	2500	60	450	3000	30
C11-500-2600	500	2600	60	450	3120	31.2
C11-500-2700	500	2700	60	450	3240	32.4
C11-500-2800	500	2800	60	450	3360	33.6
C11-500-2900	500	2900	60	450	3480	34.8
C11-500-3000	500	3000	60	450	3600	36
C11-600-400	600	400	60	550	561	5.61
C11-600-500	600	500	60	550	701	7.01
C11-600-600	600	600	60	550	841	8.41
C11-600-700	600	700	60	550	980	9.8
C11-600-800	600	800	60	550	1120	11.2
C11-600-900	600	900	60	550	1260	12.6
C11-600-1000	600	1000	60	550	1400	14
C11-600-1100	600	1100	60	550	1540	15.4

C11-600-1200	600	1200	60	550	1680	16.8
C11-600-1300	600	1300	60	550	1820	18.2
C11-600-1400	600	1400	60	550	1960	19.6
C11-600-1500	600	1500	60	550	2100	21
C11-600-1600	600	1600	60	550	2240	22.4
C11-600-1700	600	1700	60	550	2380	23.8
C11-600-1800	600	1800	60	550	2520	25.2
C11-600-1900	600	1900	60	550	2660	26.6
C11-600-2000	600	2000	60	550	2800	28
C11-600-2100	600	2100	60	550	2940	29.4
C11-600-2200	600	2200	60	550	3080	30.8
C11-600-2300	600	2300	60	550	3220	32.2
C11-600-2400	600	2400	60	550	3360	33.6
C11-600-2500	600	2500	60	550	3500	35
C11-600-2600	600	2600	60	550	3640	36.4
C11-600-2700	600	2700	60	550	3780	37.8
C11-600-2800	600	2800	60	550	3920	39.2
C11-600-2900	600	2900	60	550	4060	40.6
C11-600-3000	600	3000	60	550	4200	42
C11-900-400	900	400	60	550	776	7.8
C11-900-500	900	500	60	850	970	9.7
C11-900-600	900	600	60	850	1164	11.6
C11-900-700	900	700	60	850	1358	13.6
C11-900-800	900	800	60	850	1552	15.5
C11-900-900	900	900	60	850	1746	17.5
C11-900-1000	900	1000	60	850	1940	19.4
C11-900-1100	900	1100	60	850	2134	21.3
C11-900-1200	900	1200	60	850	2328	23.3
C11-900-1300	900	1300	60	850	2522	25.2
C11-900-1400	900	1400	60	850	2716	27.2
C11-900-1500	900	1500	60	850	2910	29.1
C11-900-1600	900	1600	60	850	3104	31
C11-900-1700	900	1700	60	850	3298	33
C11-900-1800	900	1800	60	850	3492	34.9
C11-900-1900	900	1900	60	850	3686	36.9
C11-900-2000	900	2000	60	850	3880	38.8
C11-900-2100	900	2100	60	850	4074	40.7
C11-900-2200	900	2200	60	850	4268	42.7
C11-900-2300	900	2300	60	850	4462	44.6
C11-900-2400	900	2400	60	850	4656	46.6
C11-900-2500	900	2500	60	850	4850	48.5
C11-900-2600	900	2600	60	850	5044	50.4
C11-900-2700	900	2700	60	850	5238	52.4
C11-900-2800	900	2800	60	850	5432	54.3
C11-900-2900	900	2900	60	850	5626	56.3
C11-900-3000	900	3000	60	850	5820	58.2



Common Colors
常用颜色

cool white

off white

ivory

Finish
表面效果

glossy

亮光

*Product color accept customization 产品颜色接受定制

JD-21K

试验压力
Test pressure

13Bar

Code	Height	Width	Depth	Center To Center	Power	Heating Area
型号	高度 (mm)	宽度 (mm)	深度 (mm)	中心到中心 (mm)	功率 (w)	供暖面积 (m²)
C21-300-400	300	400	70	250	450	4.5
C21-300-500	300	500	70	250	563	5.6
C21-300-600	300	600	70	250	675	6.8
C21-300-700	300	700	70	250	788	7.9
C21-300-800	300	800	70	250	900	9.0
C21-300-900	300	900	70	250	1013	10.1
C21-300-1000	300	1000	70	250	1125	11.3
C21-300-1100	300	1100	70	250	1238	12.4
C21-300-1200	300	1200	70	250	1351	13.5
C21-300-1300	300	1300	70	250	1463	14.6
C21-300-1400	300	1400	70	250	1576	15.8
C21-300-1500	300	1500	70	250	1688	16.9
C21-300-1600	300	1600	70	250	1801	18.0
C21-300-1700	300	1700	70	250	1913	19.1
C21-300-1800	300	1800	70	250	2026	20.3
C21-300-1900	300	1900	70	250	2138	21.4
C21-300-2000	300	2000	70	250	2251	22.5
C21-300-2100	300	2100	70	250	2363	23.6
C21-300-2200	300	2200	70	250	2476	24.8
C21-300-2300	300	2300	70	250	2588	25.9
C21-300-2400	300	2400	70	250	2701	27.0
C21-300-2500	300	2500	70	250	2814	28.1
C21-300-2600	300	2600	70	250	2926	29.3
C21-300-2700	300	2700	70	250	3039	30.4
C21-300-2800	300	2800	70	250	3151	31.5
C21-300-2900	300	2900	70	250	3264	32.6
C21-300-3000	300	3000	70	250	2121	21.2
C21-400-400	400	400	70	350	564	5.6
C21-400-500	400	500	70	350	705	7.1
C21-400-600	400	600	70	350	846	8.5
C21-400-700	400	700	70	350	987	9.9
C21-400-800	400	800	70	350	1128	11.3
C21-400-900	400	900	70	350	1269	12.7
C21-400-1000	400	1000	70	350	1410	14.1
C21-400-1100	400	1100	70	350	1551	15.5
C21-400-1200	400	1200	70	350	1692	16.9
C21-400-1300	400	1300	70	350	1833	18.3
C21-400-1400	400	1400	70	350	1974	19.7
C21-400-1500	400	1500	70	350	2115	21.2
C21-400-1600	400	1600	70	350	2256	22.6
C21-400-1700	400	1700	70	350	2397	24.0
C21-400-1800	400	1800	70	350	2538	25.4
C21-400-1900	400	1900	70	350	2679	26.8
C21-400-2000	400	2000	70	350	2820	28.2

Code	Height	Width	Depth	Center To Center	Power	Heating Area
型号	高度 (mm)	宽度 (mm)	深度 (mm)	中心到中心 (mm)	功率 (w)	供暖面积 (m²)
C21-400-2100	400	2100	70	350	2961	29.6
C21-400-2200	400	2200	70	350	3102	31.0
C21-400-2300	400	2300	70	350	3243	32.4
C21-400-2400	400	2400	70	350	3384	33.8
C21-400-2500	400	2500	70	350	3525	35.3
C21-400-2600	400	2600	70	350	3666	36.7
C21-400-2700	400	2700	70	350	3807	38.1
C21-400-2800	400	2800	70	350	3948	39.5
C21-400-2900	400	2900	70	350	4089	40.9
C21-400-3000	400	3000	70	350	4230	42.3
C21-500-400	500	400	70	450	711	7.1
C21-500-500	500	500	70	450	889	8.9
C21-500-600	500	600	70	450	1067	10.7
C21-500-700	500	700	70	450	1246	12.5
C21-500-800	500	800	70	450	1424	14.2
C21-500-900	500	900	70	450	1602	16.0
C21-500-1000	500	1000	70	450	1780	17.8
C21-500-1100	500	1100	70	450	1958	19.6
C21-500-1200	500	1200	70	450	2136	21.4
C21-500-1300	500	1300	70	450	2314	23.1
C21-500-1400	500	1400	70	450	2492	24.9
C21-500-1500	500	1500	70	450	2670	26.7
C21-500-1600	500	1600	70	450	2848	28.5
C21-500-1700	500	1700	70	450	3026	30.3
C21-500-1800	500	1800	70	450	3204	32.0
C21-500-1900	500	1900	70	450	3382	33.8
C21-500-2000	500	2000	70	450	3560	35.6
C21-500-2100	500	2100	70	450	3738	37.4
C21-500-2200	500	2200	70	450	3916	39.2
C21-500-2300	500	2300	70	450	4094	40.9
C21-500-2400	500	2400	70	450	4272	42.7
C21-500-2500	500	2500	70	450	4450	44.5
C21-500-2600	500	2600	70	450	4628	46.3
C21-500-2700	500	2700	70	450	4806	48.1
C21-500-2800	500	2800	70	450	4984	49.8
C21-500-2900	500	2900	70	450	5162	51.6
C21-500-3000	500	3000	70	450	5340	53.4
C21-600-400	600	400	70	550	827	8.3
C21-600-500	600	500	70	550	1033	10.3
C21-600-600	600	600	70	550	1242	12.4
C21-600-700	600	700	70	550	1449	14.5
C21-600-800	600	800	70	550	1656	16.6
C21-600-900	600	900	70	550	1863	18.6
C21-600-1000	600	1000	70	550	2070	20.7

C21-600-1100	600	1100	70	550	2277	22.8
C21-600-1200	600	1200	70	550	2484	24.8
C21-600-1300	600	1300	70	550	2691	26.9
C21-600-1400	600	1400	70	550	2898	29.0
C21-600-1500	600	1500	70	550	3105	31.1
C21-600-1600	600	1600	70	550	3312	33.1
C21-600-1700	600	1700	70	550	3519	35.2
C21-600-1800	600	1800	70	550	3726	37.3
C21-600-1900	600	1900	70	550	3933	39.3
C21-600-2000	600	2000	70	550	4140	41.4
C21-600-2100	600	2100	70	550	4347	43.5
C21-600-2200	600	2200	70	550	4554	45.5
C21-600-2300	600	2300	70	550	4761	47.6
C21-600-2400	600	2400	70	550	4968	49.7
C21-600-2500	600	2500	70	550	5175	51.8
C21-600-2600	600	2600	70	550	5382	53.8
C21-600-2700	600	2700	70	550	5589	55.9
C21-600-2800	600	2800	70	550	5796	58.0
C21-600-2900	600	2900	70	550	6003	60.0
C21-600-3000	600	3000	70	550	6210	62.1
C21-900-400	900	400	70	850	1082	10.8
C21-900-500	900	500	70	850	1353	13.5
C21-900-600	900	600	70	850	1623	16.2
C21-900-700	900	700	70	850	1894	18.9
C21-900-800	900	800	70	850	2164	21.6
C21-900-900	900	900	70	850	2435	24.4
C21-900-1000	900	1000	70	850	2705	27.1
C21-900-1100	900	1100	70	850	2976	29.8
C21-900-1200	900	1200	70	850	3246	32.5
C21-900-1300	900	1300	70	850	3517	35.2
C21-900-1400	900	1400	70	850	3787	37.9
C21-900-1500	900	1500	70	850	4058	40.6
C21-900-1600	900	1600	70	850	4328	43.3
C21-900-1700	900	1700	70	850	4599	46.0
C21-900-1800	900	1800	70	850	4869	48.7
C21-900-1900	900	1900	70	850	5140	51.4
C21-900-2000	900	2000	70	850	5410	54.1
C21-900-2100	900	2100	70	850	5681	56.8
C21-900-2200	900	2200	70	850	5951	59.5
C21-900-2300	900	2300	70	850	6222	62.2
C21-900-2400	900	2400	70	850	6492	64.9
C21-900-2500	900	2500	70	850	6763	67.6
C21-900-2600	900	2600	70	850	7033	70.3
C21-900-2700	900	2700	70	850	7304	73.0
C21-900-2800	900	2800	70	850	7574	75.7
C21-900-2900	900	2900	70	850	7845	78.5
C21-900-3000	900	3000	70	850	8115	81.2



Common Colors
常用颜色

cool white

off white

ivory

*Product color accept customization 产品颜色接受定制

JD-22K

Finish
表面效果

glossy

亮光

试验压力
Test pressure

13Bar

Code	Height	Width	Depth	Center To Center	Power	Heating Area
型号	高度 (mm)	宽度 (mm)	深度 (mm)	中心到中心 (mm)	功率 (w)	供暖面积 (m²)
C22-300-400	300	400	100	250	577	5.8
C22-300-500	300	500	100	250	721	7.2
C22-300-600	300	600	100	250	866	8.7
C22-300-700	300	700	100	250	1010	10.1
C22-300-800	300	800	100	250	1154	11.5
C22-300-900	300	900	100	250	1299	13
C22-300-1000	300	1000	100	250	1443	14.4
C22-300-1100	300	1100	100	250	1587	15.9
C22-300-1200	300	1200	100	250	1731	17.3
C22-300-1300	300	1300	100	250	1876	18.8
C22-300-1400	300	1400	100	250	2020	20.2
C22-300-1500	300	1500	100	250	2164	21.6
C22-300-1600	300	1600	100	250	2309	23.1
C22-300-1700	300	1700	100	250	2453	24.5
C22-300-1800	300	1800	100	250	2597	26
C22-300-1900	300	1900	100	250	2741	27.4
C22-300-2000	300	2000	100	250	2886	28.9
C22-300-2100	300	2100	100	250	3030	30.3
C22-300-2200	300	2200	100	250	3174	31.7
C22-300-2300	300	2300	100	250	3319	33.2
C22-300-2400	300	2400	100	250	3463	34.6
C22-300-2500	300	2500	100	250	3607	36.1
C22-300-2600	300	2600	100	250	3751	37.5
C22-300-2700	300	2700	100	250	3896	39
C22-300-2800	300	2800	100	250	4040	40.4
C22-300-2900	300	2900	100	250	4184	41.8
C22-300-3000	300	3000	100	250	4329	43.3
C22-400-400	400	400	100	350	728	7.3
C22-400-500	400	500	100	350	910	9.1
C22-400-600	400	600	100	350	1092	10.9
C22-400-700	400	700	100	350	1274	12.7
C22-400-800	400	800	100	350	1456	14.6
C22-400-900	400	900	100	350	1638	16.4
C22-400-1000	400	1000	100	350	1820	18.2
C22-400-1100	400	1100	100	350	2002	20
C22-400-1200	400	1200	100	350	2184	21.8
C22-400-1300	400	1300	100	350	2366	23.7
C22-400-1400	400	1400	100	350	2548	25.5
C22-400-1500	400	1500	100	350	2730	27.3
C22-400-1600	400	1600	100	350	2912	29.1
C22-400-1700	400	1700	100	350	3094	30.9
C22-400-1800	400	1800	100	350	3276	32.8
C22-400-1900	400	1900	100	350	3458	34.6
C22-400-2000	400	2000	100	350	3640	36.4

Code	Height	Width	Depth	Center To Center	Power	Heating Area
型号	高度 (mm)	宽度 (mm)	深度 (mm)	中心到中心 (mm)	功率 (w)	供暖面积 (m²)
C22-400-2100	400	2100	100	350	3822	38.2
C22-400-2200	400	2200	100	350	4004	40
C22-400-2300	400	2300	100	350	4186	41.9
C22-400-2400	400	2400	100	350	4368	43.7
C22-400-2500	400	2500	100	350	4550	45.5
C22-400-2600	400	2600	100	350	4732	47.3
C22-400-2700	400	2700	100	350	4914	49.1
C22-400-2800	400	2800	100	350	5096	51
C22-400-2900	400	2900	100	350	5278	52.8
C22-400-3000	400	3000	100	350	5460	54.6
C22-500-400	500	400	100	100	912	9.12
C22-500-500	500	500	100	100	1140	11.4
C22-500-600	500	600	100	100	1368	13.68
C22-500-700	500	700	100	100	1596	15.96
C22-500-800	500	800	100	100	1824	18.24
C22-500-900	500	900	100	100	2052	20.52
C22-500-1000	500	1000	100	100	2280	22.8
C22-500-1100	500	1100	100	100	2508	25.08
C22-500-1200	500	1200	100	100	2736	27.36
C22-500-1300	500	1300	100	100	2964	29.64
C22-500-1400	500	1400	100	100	3192	31.92
C22-500-1500	500	1500	100	100	3420	34.2
C22-500-1600	500	1600	100	100	3648	36.48
C22-500-1700	500	1700	100	100	3876	38.76
C22-500-1800	500	1800	100	100	4104	41.04
C22-500-1900	500	1900	100	100	4332	43.32
C22-500-2000	500	2000	100	100	4560	45.6
C22-500-2100	500	2100	100	100	4788	47.88
C22-500-2200	500	2200	100	100	5016	50.16
C22-500-2300	500	2300	100	100	5244	52.44
C22-500-2400	500	2400	100	100	5472	54.72
C22-500-2500	500	2500	100	100	5700	57
C22-500-2600	500	2600	100	100	5928	59.28
C22-500-2700	500	2700	100	100	6156	61.56
C22-500-2800	500	2800	100	100	6384	63.84
C22-500-2900	500	2900	100	100	6612	66.12
C22-500-3000	500	3000	100	100	6840	68.4
C22-600-400	600	400	100	100	1060	10.6
C22-600-500	600	500	100	100	1325	13.25
C22-600-600	600	600	100	100	1590	15.9
C22-600-700	600	700	100	100	1855	18.55
C22-600-800	600	800	100	100	2120	21.2
C22-600-900	600	900	100	100	2385	23.85
C22-600-1000	600	1000	100	100	2650	26.5

C22-600-1100	600	1100	100	100	2915	29.15
C22-600-1200	600	1200	100	100	3180	31.8
C22-600-1300	600	1300	100	100	3445	34.45
C22-600-1400	600	1400	100	100	3710	37.1
C22-600-1500	600	1500	100	100	3975	39.75
C22-600-1600	600	1600	100	100	4240	42.4
C22-600-1700	600	1700	100	100	4505	45.05
C22-600-1800	600	1800	100	100	4770	47.7
C22-600-1900	600	1900	100	100	5035	50.35
C22-600-2000	600	2000	100	100	5300	53
C22-600-2100	600	2100	100	100	5565	55.65
C22-600-2200	600	2200	100	100	5830	58.3
C22-600-2300	600	2300	100	100	6095	60.95
C22-600-2400	600	2400	100	100	6360	63.6
C22-600-2500	600	2500	100	100	6625	66.25
C22-600-2600	600	2600	100	100	6890	68.9
C22-600-2700	600	2700	100	100	7155	71.55
C22-600-2800	600	2800	100	100	7420	74.2
C22-600-2900	600	2900	100	100	7685	76.85
C22-600-3000	600	3000	100	100	7950	79.5
C22-900-400	900	400	100	850	1397	14
C22-900-500	900	500	100	850	1746	17.5
C22-900-600	900	600	100	850	2095	21
C22-900-700	900	700	100	850	2444	24.4
C22-900-800	900	800	100	850	2794	27.9
C22-900-900	900	900	100	850	3143	31.4
C22-900-1000	900	1000	100	850	3492	34.9
C22-900-1100	900	1100	100	850	3841	38.4
C22-900-1200	900	1200	100	850	4190	41.9
C22-900-1300	900	1300	100	850	4540	45.4
C22-900-1400	900	1400	100	850	4889	48.9
C22-900-1500	900	1500	100	850	5238	52.4
C22-900-1600	900	1600	100	850	5587	55.9
C22-900-1700	900	1700	100	850	5936	59.4
C22-900-1800	900	1800	100	850	6286	62.9
C22-900-1900	900	1900	100	850	6635	66.4
C22-900-2000	900	2000	100	850	6984	69.8
C22-900-2100	900	2100	100	850	7333	73.3
C22-900-2200	900	2200	100	850	7682	76.8
C22-900-2300	900	2300	100	850	8032	80.3
C22-900-2400	900	2400	100	850	8381	83.8
C22-900-2500	900	2500	100	850	8730	87.3
C22-900-2600	900	2600	100	850	9079	90.8
C22-900-2700	900	2700	100	850	9429	94.3
C22-900-2800	900	2800	100	850	9778	97.8
C22-900-2900	900	2900	100	850	10127	101.3
C22-900-3000	900	3000	100	850	10476	104.8




Common Colors
常用颜色



*Product color accept customization 产品颜色接受定制

Finish
表面效果



JD-33K

试验压力
Test pressure
13Bar

Code	Height	Width	Depth	Center To Center	Power	Heating Area
型号	高度 (mm)	宽度 (mm)	深度 (mm)	中心到中心 (mm)	功率 (w)	供暖面积 (m²)
C33-300-400	300	400	150	250	808	8.1
C33-300-500	300	500	150	250	1010	10.1
C33-300-600	300	600	150	250	1212	12.1
C33-300-700	300	700	150	250	1414	14.1
C33-300-800	300	800	150	250	1616	16.2
C33-300-900	300	900	150	250	1818	18.2
C33-300-1000	300	1000	150	250	2020	20.2
C33-300-1100	300	1100	150	250	2222	22.2
C33-300-1200	300	1200	150	250	2424	24.2
C33-300-1300	300	1300	150	250	2626	26.3
C33-300-1400	300	1400	150	250	2828	28.3
C33-300-1500	300	1500	150	250	3030	30.3
C33-300-1600	300	1600	150	250	3232	32.3
C33-300-1700	300	1700	150	250	3434	34.3
C33-300-1800	300	1800	150	250	3636	36.4
C33-300-1900	300	1900	150	250	3838	38.4
C33-300-2000	300	2000	150	250	4040	40.4
C33-300-2100	300	2100	150	250	4242	42.4
C33-300-2200	300	2200	150	250	4444	44.4
C33-300-2300	300	2300	150	250	4646	46.5
C33-300-2400	300	2400	150	250	4848	48.5
C33-300-2500	300	2500	150	250	5050	50.5
C33-300-2600	300	2600	150	250	5252	52.5
C33-300-2700	300	2700	150	250	5454	54.5
C33-300-2800	300	2800	150	250	5656	56.6
C33-300-2900	300	2900	150	250	5858	58.6
C33-300-3000	300	3000	150	250	6060	60.6
C33-400-400	400	400	150	350	1038	10.4
C33-400-500	400	500	150	350	1298	13
C33-400-600	400	600	150	350	1558	15.6
C33-400-700	400	700	150	350	1817	18.2
C33-400-800	400	800	150	350	2077	20.8
C33-400-900	400	900	150	350	2336	23.4
C33-400-1000	400	1000	150	350	2596	26
C33-400-1100	400	1100	150	350	2855	28.6
C33-400-1200	400	1200	150	350	3115	31.2
C33-400-1300	400	1300	150	350	3375	33.8
C33-400-1400	400	1400	150	350	3634	36.3
C33-400-1500	400	1500	150	350	3894	38.9
C33-400-1600	400	1600	150	350	4153	41.5
C33-400-1700	400	1700	150	350	4413	44.1
C33-400-1800	400	1800	150	350	4673	46.7
C33-400-1900	400	1900	150	350	4932	49.3
C33-400-2000	400	2000	150	350	5192	51.9

Code	Height	Width	Depth	Center To Center	Power	Heating Area
型号	高度 (mm)	宽度 (mm)	深度 (mm)	中心到中心 (mm)	功率 (w)	供暖面积 (m²)
C33-400-2100	400	2100	150	350	5452	54.5
C33-400-2200	400	2200	150	350	5711	57.1
C33-400-2300	400	2300	150	350	5971	59.7
C33-400-2400	400	2400	150	350	6230	62.3
C33-400-2500	400	2500	150	350	6490	64.9
C33-400-2600	400	2600	150	350	6749	67.5
C33-400-2700	400	2700	150	350	7009	70.1
C33-400-2800	400	2800	150	350	7268	72.7
C33-400-2900	400	2900	150	350	7528	75.3
C33-400-3000	400	3000	150	350	7788	77.9
C33-500-400	500	400	150	145	1277	12.77
C33-500-500	500	500	150	145	1596	15.96
C33-500-600	500	600	150	145	1914	19.14
C33-500-700	500	700	150	145	2233	22.33
C33-500-800	500	800	150	145	2552	25.52
C33-500-900	500	900	150	145	2871	28.71
C33-500-1000	500	1000	150	145	3190	31.9
C33-500-1100	500	1100	150	145	3509	35.09
C33-500-1200	500	1200	150	145	3828	38.28
C33-500-1300	500	1300	150	145	4147	41.47
C33-500-1400	500	1400	150	145	4466	44.66
C33-500-1500	500	1500	150	145	4785	47.85
C33-500-1600	500	1600	150	145	5104	51.04
C33-500-1700	500	1700	150	145	5423	54.23
C33-500-1800	500	1800	150	145	5742	57.42
C33-500-1900	500	1900	150	145	6061	60.61
C33-500-2000	500	2000	150	145	6380	63.8
C33-500-2100	500	2100	150	145	6699	66.99
C33-500-2200	500	2200	150	145	7018	70.18
C33-500-2300	500	2300	150	145	7337	73.37
C33-500-2400	500	2400	150	145	7656	76.56
C33-500-2500	500	2500	150	145	7975	79.75
C33-500-2600	500	2600	150	145	8294	82.94
C33-500-2700	500	2700	150	145	8613	86.13
C33-500-2800	500	2800	150	145	8932	89.32
C33-500-2900	500	2900	150	145	9251	92.51
C33-500-3000	500	3000	150	145	9570	95.7
C33-600-400	600	400	150	145	1484	14.84
C33-600-500	600	500	150	145	1855	18.55
C33-600-600	600	600	150	145	2226	22.26
C33-600-700	600	700	150	145	2597	25.97
C33-600-800	600	800	150	145	2968	29.68
C33-600-900	600	900	150	145	3339	33.39
C33-600-1000	600	1000	150	145	3710	37.1

C33-600-1100	600	1100	150	145	4081	40.81
C33-600-1200	600	1200	150	145	4452	44.52
C33-600-1300	600	1300	150	145	4823	48.23
C33-600-1400	600	1400	150	145	5194	51.94
C33-600-1500	600	1500	150	145	5565	55.65
C33-600-1600	600	1600	150	145	5936	59.36
C33-600-1700	600	1700	150	145	6307	63.07
C33-600-1800	600	1800	150	145	6678	66.78
C33-600-1900	600	1900	150	145	7049	70.49
C33-600-2000	600	2000	150	145	7420	74.2
C33-600-2100	600	2100	150	145	7791	77.91
C33-600-2200	600	2200	150	145	8162	81.62
C33-600-2300	600	2300	150	145	8533	85.33
C33-600-2400	600	2400	150	145	8904	89.04
C33-600-2500	600	2500	150	145	9275	92.75
C33-600-2600	600	2600	150	145	9646	96.46
C33-600-2700	600	2700	150	145	10017	100.17
C33-600-2800	600	2800	150	145	10388	103.88
C33-600-2900	600	2900	150	145	10759	107.59
C33-600-3000	600	3000	150	145	11130	111.3
C33-900-400	900	400	150	850	1924	19.2
C33-900-500	900	500	150	850	2406	24.1
C33-900-600	900	600	150	850	2887	28.9
C33-900-700	900	700	150	850	3368	33.7
C33-900-800	900	800	150	850	3849	38.5
C33-900-900	900	900	150	850	4330	43.3
C33-900-1000	900	1000	150	850	4811	48.1
C33-900-1100	900	1100	150	850	5292	52.9
C33-900-1200	900	1200	150	850	5773	57.7
C33-900-1300	900	1300	150	850	6254	62.5
C33-900-1400	900	1400	150	850	6735	67.4
C33-900-1500	900	1500	150	850	7217	72.2
C33-900-1600	900	1600	150	850	7698	77
C33-900-1700	900	1700	150	850	8179	81.8
C33-900-1800	900	1800	150	850	8660	86.6
C33-900-1900	900	1900	150	850	9141	91.4
C33-900-2000	900	2000	150	850	9622	96.2
C33-900-2100	900	2100	150	850	10103	101
C33-900-2200	900	2200	150	850	10584	105.8
C33-900-2300	900	2300	150	850	11065	110.7
C33-900-2400	900	2400	150	850	11546	115.5
C33-900-2500	900	2500	150	850	12028	120.3
C33-900-2600	900	2600	150	850	12509	125.1
C33-900-2700	900	2700	150	850	12990	129.9
C33-900-2800	900	2800	150	850	13471	134.7
C33-900-2900	900	2900	150	850	13952	139.5
C33-900-3000	900	3000	150	850	14433	144.3